


## Podatkovni list proizvoda

### Karakteristike

## VZ20

TeSys VARIO – pomoćni kontakti blok – 1 NO + 1 NO

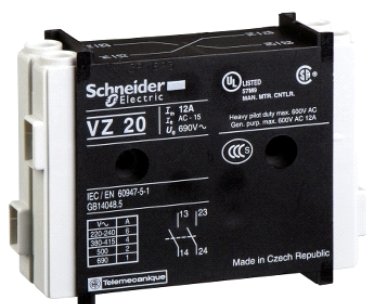

### Glavno

Range	TeSys
Device short name	VZ
Product or component type	Auxiliary contact block
Performance level	High performance
Contacts type and composition	1 NO + 1 NO
Product compatibility	V02 V1 V2 V3 V4 V5 V6 V0 V01
Network type	AC DC
Network frequency	50/60 Hz
Mounting location	Right

### Komplementarno

[Ue] rated operational voltage	690 V AC 50/60 Hz
[Uimp] rated impulse withstand voltage	8 kV
[Ith] conventional free air thermal current	12 A
[Ithe] conventional enclosed thermal current	10 A
Mechanical durability	100000 cycles
Electrical durability	100000 cycles AC-15 30000 cycles DC-11
Connections - terminals	Screw clamp terminals 2 cable 0.75...1.5 mm <sup>2</sup> - cable stiffness: flexible - with cable end cable end Screw clamp terminals 2 cable 1...2.5 mm <sup>2</sup> - cable stiffness: solid -
Tightening torque	0.7 N.m - on screw clamp terminals
Height	65 mm
Width	20 mm
Depth	48.5 mm
Product weight	0.05 kg

### Okolina

standards	IEC 60947-5
product certifications	CSA GL UL
protective treatment	TC
IP degree of protection	IP20 conforming to IEC 60529
ambient air temperature for operation	-20...50 °C
fire resistance	960 °C conforming to IEC 60695-2-1

### Contractual warranty

Warranty period	18 months
-----------------	-----------

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu sadržanih informacija.