

Pact Series

MasterPact™ MTZ

**Catalogue numbers
and spare parts 2019**
Air circuit breakers
and switch-disconnectors



...SUSTAINABILITY READY

Contribute to a better world — with MasterPact MTZ circuit breakers you can enhance sustainability.

Build superior sustainable and efficient properties by reducing CO₂ emissions, utility and operating costs as well as improving the well-being of property occupants for both new construction and renovation projects.



Achieve Green Building certification with MasterPact MTZ:

In compliance with ISO 14025 PEP Ecopassport program, Schneider Electric publishes a comprehensive Life Cycle Analysis of our product, providing the environmental data you need to achieve Green Building certifications.

For example, MasterPact MTZ contributes to 4 LEED™ points:

- Building Product Disclosure and Optimization
- Advanced Energy Metering



Circular
performance



Resource
performance



Well-being
performance

With the addition of digital modules, the circuit breaker can be upgraded and modernized at any time after installation without disrupting electrical service.

Better durability with improved mechanical and electrical performance along with remote monitoring to help facilitate predictive maintenance.

The embedded class 1 metering allows active power and energy to be monitored, helping facility managers reduce their CO₂ emissions and energy costs when connected to any building and energy management system.

MasterPact MTZ is fully RoHS and REACH compliant.



Experience the
difference today at
[schneider-electric.
com/green-premium](https://schneider-electric.com/green-premium)

Order your circuit breaker

Order your MasterPact MTZ through digital tools

Product selector.....	I-3
MasterPact MTZ Product Code.....	I-5
GoDigital	I-6

MTZ1 06 to MTZ1 16 fixed circuit breakers

Circuit breakers.....	I-7
Connections	I-8
Indication contacts and remote operation	I-9
Remote operation.....	I-10

MTZ1 06 to MTZ1 16 drawout circuit breakers

Circuit breakers.....	I-11
Circuit breaker and connections	I-12
Chassis locking and accessories.....	I-13
Indication contacts and remote operation	I-14
Remote operation.....	I-15

Accessories for MTZ1 06 to MTZ1 16

fixed or drawout circuit breakers	I-16
---	------

MTZ1 06 to MTZ1 16 fixed switch-disconnectors

Switch-disconnectors	I-18
Connections	I-19

MTZ1 06 to MTZ1 16 drawout switch-disconnectors

Switch-disconnectors	I-20
Connections	I-21

MTZ2 08 to MTZ3 63 fixed circuit breakers

Circuit breakers.....	I-22
Connections	I-23
Indication contacts and remote operation	I-24
Remote operation.....	I-25

MTZ2 08 to MTZ3 63 drawout circuit breakers

Circuit breakers.....	I-26
Chassis.....	I-27
Connections	I-28
Chassis locking and accessories.....	I-29
Indication contacts and remote operation	I-31
Remote operation.....	I-32

Accessories for MTZ2 08 to MTZ3 63

fixed and drawout circuit breakers.....	I-33
---	------

MTZ2 08 to MTZ3 63 fixed switch-disconnectors

Switch-disconnectors	I-35
Connections	I-36
Connections	I-39

MTZ2 08 to MTZ3 63 circuit breakers

with neutral on the right

Circuit breakers.....	I-40
-----------------------	------

MTZ2 08 to MTZ2 40 - 1000 V AC

Drawout circuit breakers and switch-disconnectors.....	I-41
Drawout circuit breakers and switch-disconnectors	
Chassis and connections	I-42

Order your circuit breaker

MasterPact MTZ1

Connection.....	I-44
MicroLogic X control unit, communication option, accessories	I-45
Remote operation.....	I-46
Chassis locking and accessories.....	I-47
Clusters - NT chassis retrofit to MTZ1	I-48
Circuit breaker locking and accessories.....	I-49
Mechanical interlocking for source changeover	I-50
Indication contacts.....	I-51
Communication, monitoring and control	I-52

MasterPact MTZ2/3

Connection.....	I-53
MicroLogic X control unit, communication option, accessories	I-54
Remote operation.....	I-55
Chassis locking and accessories.....	I-56
Clusters - NW chassis retrofit to MTZ2/MTZ3	I-57
Circuit breaker locking and accessories.....	I-58
Mechanical interlocking for source changeover	I-59
Indication contacts.....	I-60
Communication, monitoring and control	I-61

Other chapters

Select your circuit breakers and switch-disconnectors.....	A-1
Select your MicroLogic X control unit.....	B-1
Customize your MicroLogic X with digital modules.....	C-1
Customize your circuit breaker with accessories	D-1
Integrate in Smart panels - Architecture and systems	E-1
Integrate in switchboard	F-1
Integrate in special applications - Source-changeover systems.....	G-1
Services.....	H-1

Order your Masterpact MTZ through digital tools

MyPact

To simplify and expedite the ordering of Masterpact MTZ, three new tools are introduced:

- **MyPact:** An online software tool to help create and save the configuration of LV Circuit breaker. It ensures quick and errorless configuration and ordering
- **Product Code:** An alphanumeric code representing the configuration of a Masterpact MTZ circuit breaker. It simplifies the way to communicate the configuration of a Masterpact MTZ circuit breaker during ordering, sharing information and asking for help remotely.
- **GoDigital:** An online market place to purchase Digital Modules 24/7. It allows upgrading of Masterpact MTZ at anytime anywhere.

MyPact

MyPact aims at providing a fast, secure and smart way of selecting and configuring LV Circuit Breaker ranges. It includes the selection of the basic frame, control unit, accessories and Digital Modules. Compared with the traditional way of filling up order forms or specifying customer functions, it brings the following benefits:


- state-of-the-art ergonomic, intuitive and interactive interface eases and speeds up the configuration
- configuration rules are embedded, compatible options are automatically filtered and completeness of the configuration is checked. It ensures the correct configuration and saves time fixing mistakes.
- configurations can be saved either locally or through cloud service. Repeated configuration or modified configuration can be done in a fraction of the time.

> Go to MyPact



Yesterday,


Ordering process of Masterpact NT/NW, new or repeat or modified configuration

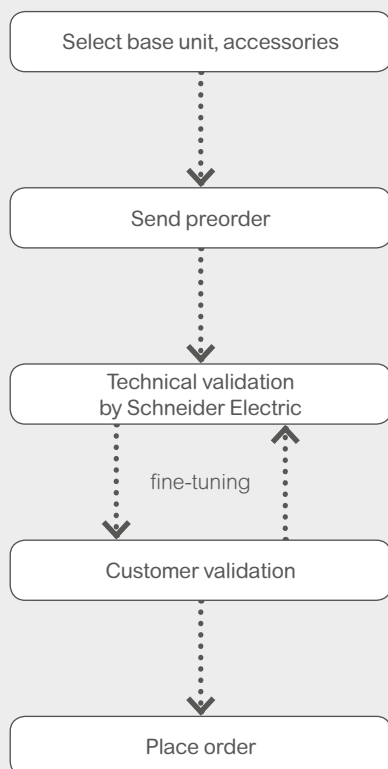


Today,

Ordering process of Masterpact MTZ with MyPact

new configuration

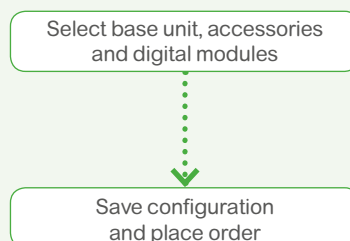

repeat or modified configuration

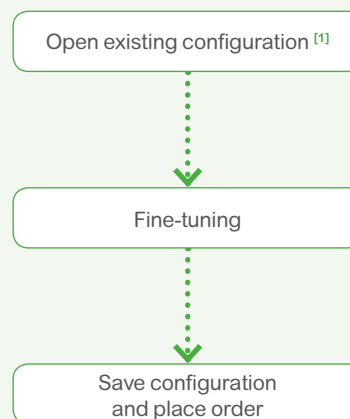


[1] Existing configuration can be opened directly in the saved configurations or by entering the Product Code.


Order your Masterpact MTZ through digital tools

MyPact

Homepage

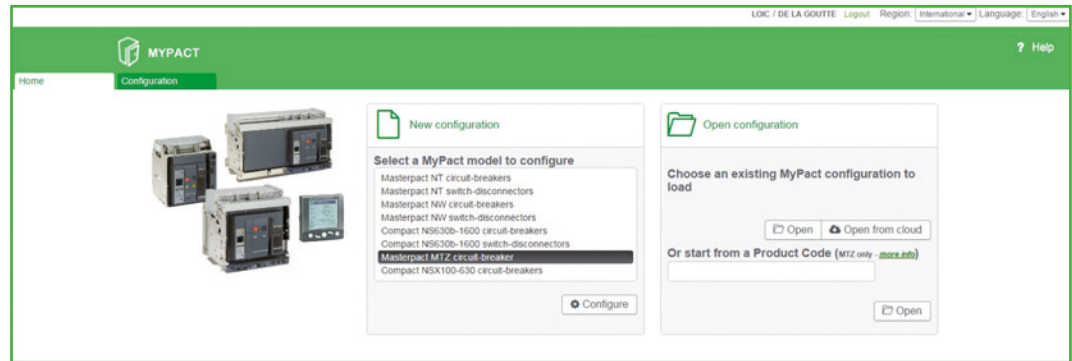

Configuration page

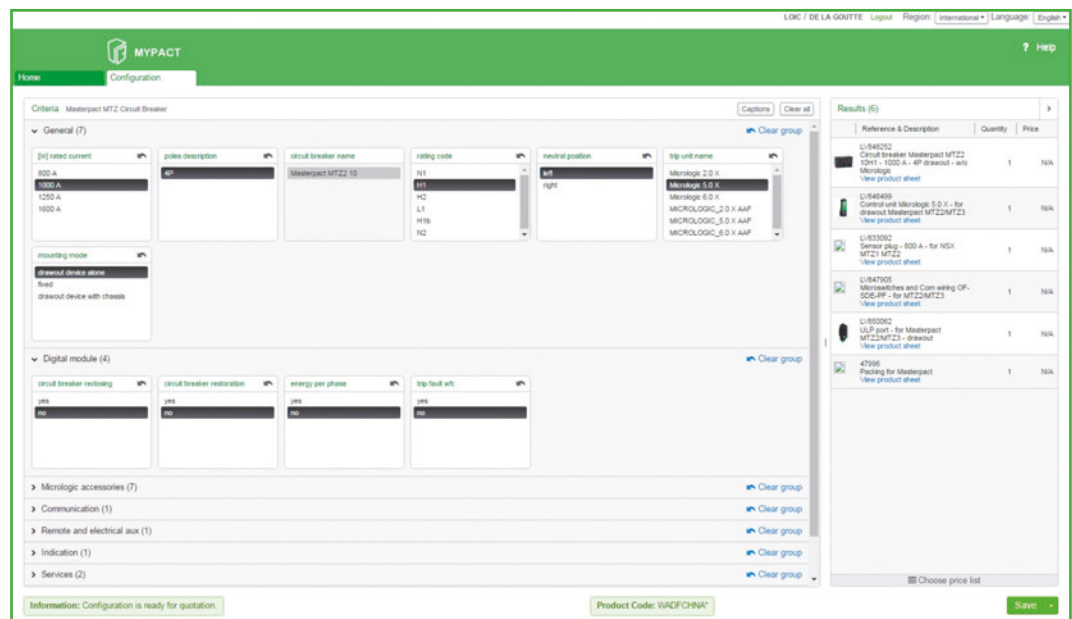

Note:

- All configurations are encouraged to be done in MyPact. If you have difficulties accessing or using MyPact, contact Schneider Electric Customer Care Centre or your Schneider Electric sales representatives for more information about MTZ ordering.
- An overview of how to use MyPact can be accessed through MyPact portal to help first time users quickly be autonomous.

Order your Masterpact MTZ through digital tools

Masterpact MTZ Product Code

Masterpact MTZ Product Code is an alphanumeric code representing the complete configuration of a Masterpact MTZ circuit breaker. It will be automatically generated for each Masterpact MTZ circuit breaker after completing the configuration through MyPact. It will appear in the invoice and delivery documents as well as the labelling on the Masterpact MTZ circuit breaker and the packaging.

Masterpact MTZ Product Code brings the following benefits:

- Quick and unique identification of the initial configuration of a circuit breaker can be achieved by reading the code on the physical products or other recordings
- Reordering of the same Masterpact MTZ circuit breaker is simplified by communicating configuration through product code
- Recording or sharing information about the initial configuration of a circuit breaker is simplified

Details of the coding rules can be accessed through MyPact portal and here are some of the highlights:

- All options of accessories are coded.
- The minimum length of the code is 9 characters and the maximum length of the code is 33* characters depending on the choice of the accessories.
- Capital letters, numbers and start sign ^[1] are used.

[1] The maximum length of the code may change due to future enrichment of the offer.

An example of Masterpact MTZ product code

- Masterpact type: MTZ2
- Rating: 1000A
- Sensor rating: 800A
- Performance Level: H1
- Micrologic: 5.0 X
- VPS module: Yes
- Number of poles: 4P
- Type of installation: Drawout with chassis
- Connection: Top Horizontal Bottom Horizontal
- Type of communication: ULP + EIFE without I/O module
- Accessories for Design & Installation simplification and operation efficiency: No
- Accessories for People and Property Safety: No
- Digital Modules: Energy per phase

> Product Code: WADFEEADNA**

Yesterday



Calling CCC and try to explain all the customer functions


When you want to share information with your colleagues or Schneider Electric CCC

Today



Sending a text message through CCC app with the product code

Yesterday

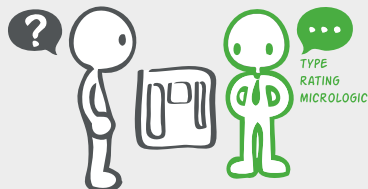

Engaging Schneider Electric Field Service to conduct an analysis

When you want to know the configuration of a circuit breaker

Today



Checking the product code on the physical products


Yesterday



Fill up order form or calling Schneider Electric CCC

When you want to reorder a circuit breaker

Today

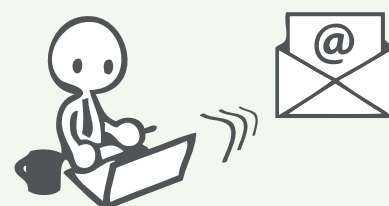

Type in the product code through MyPact and send order

Order your Masterpact MTZ through digital tools

GoDigital

> Go to GoDigital



GoDigital is the Schneider Electric market place that allows you to purchase Digital Modules for Masterpact MTZ control unit Micrologic X that has already installed in the Masterpact MTZ. It provides different Digital Modules to customize your control unit with advanced protection, metering and diagnosis functionalities. It is open 24/7. With GoDigital, Panel Builders have the flexibility to further customize the Micrologic X features at last minute before commissioning the switchboard. Electrical contractors and facility managers can upgrade the install base during operational phase of product life cycle, according to new requirements, anytime, without changing the hardware or disrupting operations.*

Note: Changing the protection functions among LI (Micrologic 2.0 X), LSI (Micrologic 5.0 X), LSIG (Micrologic 6.0 X) and LSIV (Micrologic 7.0 X) requires the change of the Micrologic X.

The screenshot displays the GoDigital interface with a sidebar on the left containing 'Circuit Breakers Digital Modules (4)', 'Metering (1)', and 'Diagnosis (3)'. The main content area lists two modules:

- LV850002-Energy per Phase**: Priced at £ 16.65 (Actual price: £ 33.30, Discount: 50%). The service short description states: 'At the point of measure, it allows to calculate and display the active, reactive and apparent energy.' A link '> Read more and buy' is provided.
- LV850005-Masterpact operation assistant**: Priced at £ 28.65 (Actual price: £ 57.30, Discount: 50%). The service short description states: 'This function aim to assist the Masterpact operator to reclose the breaker.' A link '> Read more and buy' is provided.

Each Digital Module purchased is delivered with a software license for a unique Micrologic X control unit and can only be installed on that particular Micrologic X. Therefore, the Micrologic X control unit serial number needs to be reregistered in the GoDigital platform for the first time purchase.

For the first purchase for a particular Micrologic X, three ways are available:

1) Ecoreach

When connected to Micrologic X through either USB connection or IFE/EIFE connection, Ecoreach can read the unique serial number* and identify the Micrologic X. It will also show all the available Digital Modules which are compatible with the Micrologic X firmware version. When clicking "Buy", it will direct the user to GoDigital marketplace PC version with the Micrologic X serial number automatically registered in it.

2) EcoStruxure Power Device Operate App

When connected to Micrologic X through either Bluetooth connection or NFC connection, EcoStruxure Power Device Operate App will identify the Micrologic X and proposes available Digital Modules. When clicking "Purchase", it will direct the user to GoDigital marketplace mobile version with the Micrologic X serial number automatically registered in it.

3) GoDigital mobile version

Flash the QR code on Micrologic X using a mobile phone. Go2SE page will provide the user direct link to the mobile version of the site GoDigital. User can proceed directly with the purchasing or save the Micrologic X serial number in the "My assets" section in the GoDigital for future purchase.

For the second purchase of the same Micrologic X control unit.

4) GoDigital PC version

In the section "My assets", choose the serial number of the Micrologic X to be upgraded and purchase the additional Digital Modules.

<http://godigital.schneider-electric.com/>

Note:

■ Please note that GoDigital platform is only used to purchase Digital Modules for Micrologic X which is already installed.

When ordering a new circuit breaker, Digital Modules are selected in MyPact and installed in factory before delivered.

■ The serial number is also printed on the faceplate of Micrologic X


MTZ1 06 to MTZ1 16 fixed circuit breakers

Circuit breakers

A MasterPact fixed circuit breaker is described by 4 catalogue numbers corresponding to:

- the basic circuit breaker
- a control unit
- a top connection
- a bottom connection.

A communication option and various auxiliaries and accessories may also be added.



Basic circuit breaker

Type H1					
			3P		4P
	In (A at 40 °C)	Icu (kA for U = 220/440 V) - Ics = 100 %	Icu		
MTZ1 06	630	42	LV847110		LV847115
MTZ1 08	800	42	LV847120		LV847125
MTZ1 10	1000	42	LV847130		LV847135
MTZ1 12	1250	42	LV847140		LV847145
MTZ1 16	1600	42	LV847150		LV847155

Type H2					
			3P		4P
	In (A at 40 °C)	Icu (kA for U = 220/440 V) - Ics = 100 %	Icu		
MTZ1 06	630	50	LV847113		LV847119
MTZ1 08	800	50	LV847123		LV847128
MTZ1 10	1000	50	LV847131		LV847138
MTZ1 12	1250	50	LV847141		LV847147
MTZ1 16	1600	50	LV847151		LV847157

Type H3					
			3P		4P
	In (A at 40 °C)	Icu (kA for U = 220/440 V) - Ics = 100 %	Icu		
MTZ1 06	630	66	LV846436		LV846443
MTZ1 08	800	66	LV846437		LV846444
MTZ1 10	1000	66	LV846438		LV846445
MTZ1 12	1250	66	LV846439		LV846446
MTZ1 16	1600	66	LV846440		LV846447

Type L1					
			3P		4P
	In (A at 40 °C)	Icu (kA for U = 220/440 V) - Ics = 100 %	Icu		
MTZ1 06	630	150	LV847112		LV847117
MTZ1 08	800	150	LV847122		LV847127
MTZ1 10	1000	150	LV847132		LV847137

MicroLogic X control unit

"Class1 IEC 61557-12 certified power meter "

		3P/4P
MicroLogic 2.0 X	basic protection	LV847280
MicroLogic 5.0 X	selective protection	LV847283
MicroLogic 6.0 X	selective + earth-fault protection	LV847288
MicroLogic 7.0 X	selective + earth-leakage protection	LV847287

Digital modules option

	3P/4P
Energy per phase	LV850002
Power restoration assistant	LV850004
MasterPact operation assistant	LV850005
Individual harmonics analysis	LV850006
ANSI 51N/51G - Ground fault Alarm	LV850007
ERMS - Energy Reducing Maintenance Settings	LV850009
ANSI 32P - Reverse active power protection	LV850011
ANSI 27/59 - Under/Over voltage protection	LV850012
ANSI 81 - Under/Over frequency protection	LV850013
Modbus legacy dataset	LV850045
Waveform capture trip event	LV850003

Ethernet communication option

ULP Port	LV850063
ULP port wires for MTZ1	LV836388
IFM Modbus interface	LV434000
IFE Ethernet interface for LV breaker	LV434001
Ethernet interface for LV breakers and gateway	LV434002
I/O application module	LV434063

Auxiliaries and accessories:

for fixed devices: see [page I-16](#).

for fixed or drawout devices: see [page I-16](#).


Switch-disconnector version: see [page I-18](#).

Source changeover assembly: see [page I-16](#).

MTZ1 06 to MTZ1 16 fixed circuit breakers


Connections

Front connection

 DB117100.eps	630-1600 A	Top	3P	4P
		Bottom	LV847328 LV847329	LV847330 LV847331

Front connection accessories

Vertical connection adapters 630-1600 A

 DB117080.eps	3P (3 parts)	LV833642SP
	4P (4 parts)	LV833643SP

Interphase barriers

 DB117109.eps	3P/4P top (3 parts)	LV833648SP
	3P/4P bottom (3 parts)	LV833648SP

Arc chute screen

 DB117090.eps	3P	LV847335SP
	4P	LV847336SP

Rear connection

Vertical connection

 DB117077.eps	630-1600 A	Top	3P	4P
		Bottom	LV833604 LV833605	LV833614 LV833615

Horizontal connection


 DB117076.eps	630-1600 A	Top	3P	4P
		Bottom	LV833606 LV833607	LV833616 LV833617

Rear connection accessories


 DB117108.eps	Interphase barriers			
	3P/4P top (3 parts)		LV833648SP	
	3P/4P bottom (3 parts)		LV833648SP	

Common accessories for front and rear connections

Spreaders

 DB117075.eps	630-1600 A	3P	LV833622SP	
		4P	LV833623SP	
	For front and horizontal rear connection			

Cable lug adapters 630-1600 A


 DB117079.eps	3P (3 parts)	LV833644SP
	4P (4 parts)	LV833645SP

MTZ1 06 to MTZ1 16 fixed circuit breakers


Indication contacts and remote operation

Indication contacts


ON/OFF indication contacts (OF)

DB117097.eps		Changeover contacts (6 A - 240 V)	4 (standard)
		1 low-level OF to replace 1 standard OF (4 max.)	LV847339
			

"Fault trip" indication contacts (SDE)


DB117099.eps		Changeover contact (6 A - 240 V)	1 (standard)
		1 additional SDE (6 A - 240 V)	LV847340
		1 additional low-level SDE	LV847341
			

Programmable contacts (programmed via MicroLogic X control unit)

DB424639.eps		2 contacts (M2C) (5 A - 240 V)	LV847403
			

Remote operation


"Ready to close" contact (1 max.)

DB117070.eps			PF
		1 changeover contact (5 A - 240 V)	LV847342
		1 low-level changeover contact	LV847343
			

Electrical closing pushbutton

DB424640.eps			BPFE
		1 pushbutton	LV847512
			

Remote reset after fault trip


DB424641.eps		Electrical reset	RES
		100/130 V AC	LV847344
		200/240 V AC	LV847345
		Automatic reset	RAR
		Adaptation	LV847346
			

MTZ1 06 to MTZ1 16 fixed circuit breakers

Remote operation


Remote ON/OFF

Gear motor



AC 50/60 Hz	48 V	MCH
	100/130 V	LV847391
	200/240 V	LV847395
	277/415 V	LV847396
	440/480 V	LV847398
DC	24/30 V	LV847400
	48/60 V	LV847390
	100/130 V	LV847391
	200/250 V	LV847392
		LV847393


Instantaneous voltage releases



		Closing release	Opening release
Standard		XF	MX
AC 50/60 Hz	24/30 V DC, 24 V AC	LV847350	LV847360
	48/60 V DC, 48 V AC	LV847351	LV847361
	100/130 V AC/DC	LV847352	LV847362
	200/250 V AC/DC	LV847353	LV847363
	277 V AC	LV847354	LV847364
DC	380/480 V AC	LV847355	LV847365
Diagnostics & Communicating		XF diag & com	MX diag & com
AC 50/60 Hz	24/30 V DC, 24 V AC	LV847311	LV847321
	48/60 V DC, 48 V AC	LV847312	LV847322
	100/130 V AC/DC	LV847313	LV847323
	200/250 V AC/DC	LV847314	LV847324
	277 V AC	LV847315	LV847325
DC	380/480 V AC	LV847316	LV847326
Standard		Opening release	
		MN	
AC 50/60 Hz	24/30 V DC, 24 V AC	LV847380	
	48/60 V DC, 48 V AC	LV847381	
	100/130 V AC/DC	LV847382	
	200/250 V AC/DC	LV847383	
	380/480 V AC	LV847385	
Diagnostics		MN diag	
AC 50/60 Hz	24/30 V DC, 24 V AC	LV836700	
	48/60 V DC, 48 V AC	LV836701	
	100/130 V AC/DC	LV836702	
	200/250 V AC/DC	LV836703	
	380/480 V AC	LV836704	


Remote tripping

Instantaneous voltage release



AC 50/60 Hz	24/30 V DC, 24 V AC	2 nd MX
	48/60 V DC, 48 V AC	LV847370
	100/130 V AC/DC	LV847371
	200/250 V AC/DC	LV847372
	277 V AC	LV847373
DC	380/480 V AC	LV847374
		LV847375

MN delay unit



AC 50/60 Hz	48/60 V AC/DC	R (non-adjustable)	Rr (adjustable)
	100/130 V AC/DC	LV833684SP	LV833680SP
	200/250 V AC/DC	LV833685SP	LV833681SP
	380/480 V AC/DC		LV833682SP
DC			LV833683SP

[1] No compatible with any version of MN coils.


MTZ1 06 to MTZ1 16 drawout circuit breakers

Circuit breakers

A MasterPact drawout circuit breaker is described by minimum 5 catalogue numbers corresponding to:

- the basic circuit breaker
- a control unit
- a chassis with standard terminal blocks
- a top connection
- a bottom connection.

A communication option and various auxiliaries and accessories may also be added.

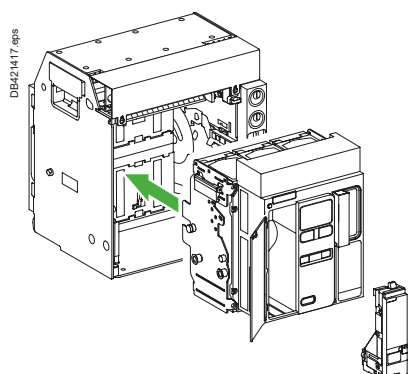

Basic circuit breaker

Type H1			
		3P	4P
	In (A at 40 °C)	Icu (kA for U = 220/440 V) - Ics = 100 % Icu	
MTZ1 06	630	42	LV847200
MTZ1 08	800	42	LV847210
MTZ1 10	1000	42	LV847220
MTZ1 12	1250	42	LV847230
MTZ1 16	1600	42	LV847240

Type H2			
		3P	4P
	In (A at 40 °C)	Icu (kA for U = 220/440 V) - Ics = 100 % Icu	
MTZ1 06	630	50	LV847203
MTZ1 08	800	50	LV847211
MTZ1 10	1000	50	LV847221
MTZ1 12	1250	50	LV847231
MTZ1 16	1600	50	LV847241

Type H3			
		3P	4P
	In (A at 40 °C)	Icu (kA for U = 220/440 V) - Ics = 100 % Icu	
MTZ1 06	630	66	LV846450
MTZ1 08	800	66	LV846451
MTZ1 10	1000	66	LV846452
MTZ1 12	1250	66	LV846453
MTZ1 16	1600	66	LV846454

Type L1			
		3P	4P
	In (A at 40 °C)	Icu (kA for U = 220/415 V) - Ics = 100 % Icu	
MTZ1 06	630	150	LV847202
MTZ1 08	800	150	LV847212
MTZ1 10	1000	150	LV847222

MicroLogic X control unit

"Class1 IEC 61557-12 certified power meter "

		3P/4P
MicroLogic 2.0 X	basic protection	LV847281
MicroLogic 5.0 X	selective protection	LV847284
MicroLogic 6.0 X	selective + earth-fault protection	LV847292
MicroLogic 7.0 X	selective + earth-leakage protection	LV865307

Digital modules option

	3P/4P
Energy per phase	LV850002
Power restoration assistant	LV850004
MasterPact operation assistant	LV850005
Individual harmonics analysis	LV850006
ANSI 51N/51G - Ground fault Alarm	LV850007
ERMS - Energy Reducing Maintenance Settings	LV850009
ANSI 32P - Reverse active power protection	LV850011
ANSI 27/59 - Under/Over voltage protection	LV850012
ANSI 81 - Under/Over frequency protection	LV850013
Modbus legacy dataset	LV850045
Waveform capture trip event	LV850003

Chassis

For type H1 - H2 -H3

	3P	4P
630-1250 A	LV833722	LV833725
1600 A	LV833723	LV833726

For type L1

	3P	4P
630-1000 A	LV833723	LV833726

Auxiliaries and accessories:

for drawout devices: see [page I-16](#).

for fixed or drawout devices: see [page I-16](#).

Switch-disconnector version: see [page I-18](#).

Source changeover assembly: see [page I-16](#).

MTZ1 06 to MTZ1 16 drawout circuit breakers

Circuit breaker and connections

Chassis terminal blocks

Standard terminal blocks

Each chassis comes equipped in standard with the terminal blocks corresponding to the customer functions below:

- the basic device : OF1, OF2, OF3, OF4, SDE1, UC3 (UC3 for 3P chassis only, not for 4P)
- the MicroLogic control unit : UC1, UC2
- the 5 most common accessories : MN/MX2, MX1, XF, PF, MCH.

Additional terminal blocks

If the device is equipped with one or a combination of the following 3 additional accessories:

- SDE2/RES
- M2C/ESM
- PTE


all the necessary chassis terminal blocks are coded by one of the part numbers below :

Chassis terminal block for PTE	LV839461
Chassis terminal block for SDE2	LV839462
Chassis terminal blocks for PTE + SDE2	LV839463
Chassis terminal block for M2C/ESM	LV839464
Chassis terminal blocks for SDE2 + M2C/ESM	LV839465

Ethernet communication option


ULP port		LV850064
ULP port wires for MTZ1		LV836388
EIFE	Embedded ethernet interface for LV breaker	LV851100
IFM	Modbus interface	LV434000
IFE	Ethernet interface for LV breaker	LV434001
	Ethernet interface for LV breakers and gateway	LV434002
I/O application module		LV434063

Chassis front connection

	630-1600 A	Top	3P	4P
			LV833727	LV833733
		Bottom	LV833728	LV833734


Front connection accessories

Vertical connection adapters 630-1600 A


	3P (3 parts)	LV833642SP
	4P (4 parts)	LV833643SP

Chassis rear connection

Vertical connection

	630-1600 A	Top	3P	4P
			LV833729	LV833735
		Bottom	LV833730	LV833736

Horizontal connection


	630-1600 A	Top	3P	4P
			LV833731	LV833737
		Bottom	LV833732	LV833738

Rear connection accessories


	Interphase barriers ^[1]	
	3P/4P (3 parts)	LV833768SP
	[1] The same kit covers the top and the bottom connections on the same time.	

Common accessories for front and rear connection

Spreaders

	630-1600 A	3P	LV833622SP
		4P	LV833623SP
	For front and horizontal rear connection.		

Cable lug adapters 630-1600 A


	3P (3 parts)	LV833644SP
	4P (4 parts)	LV833645SP

MTZ1 06 to MTZ1 16 drawout circuit breakers

Chassis locking and accessories

Chassis locking

"Disconnected" position locking



By padlocks

	VCPO	Standard
--	------	----------

By Profalux keylocks

Profalux	1 lock with 1 key + adaptation kit	LV833773
	2 locks 1 key + adaptation kit	LV833774
	2 locks 2 different keys + adaptation kit	LV833775


By Ronis keylocks

Ronis	1 lock with 1 key + adaptation kit	LV833776
	2 locks 1 key + adaptation kit	LV833777
	2 locks 2 different keys + adaptation kit	LV833778

	Optional disconnected/test/connected position locking	LV833779
--	---	----------

Adaptation kit (without keylock):	adaptation kit Profalux / Ronis	LV833769SP
	adaptation kit Castell	LV833771SP
	adaptation kit Kirk	LV833772SP

Door interlock (1 part)



	Right-hand side of chassis (VPECD)	LV833786
	Left-hand side of chassis (VPECG)	LV833787

Racking interlock



	Racking interlock (VPOC)	LV833788
--	--------------------------	----------


Breaker mismatch protection



	Breaker mismatch protection (VDC)	LV833767SP
--	-----------------------------------	------------


Chassis accessories

Arc chute cover




	3P/4P	Standard
--	-------	----------

Auxiliary terminal shield (CB)



Terminal shield	3P	LV833763
	4P	LV833764

Safety shutters as standard



Safety shutters (VO)	3P	Standard
	4P	Standard


MTZ1 06 to MTZ1 16 drawout circuit breakers

Indication contacts and remote operation

Indication contacts

ON/OFF indication contacts (OF)


DB117063.eps



Changeover contacts (6 A - 240 V)	4 (standard)
1 low-level OF to replace 1 standard OF (4 max.)	LV833806

"Fault trip" indication contacts (SDE)


DB117065.eps



Changeover contact (6 A - 240 V)	1 (standard)
1 additional SDE (6 A - 240 V)	LV847430
1 additional low-level SDE	LV847431

Programmable contacts (programmed via MicroLogic X control unit)

DB424645.eps



2 contacts M2C (5 A - 240 V)	LV847483
------------------------------	-----------------

Carriage switches (connected / disconnected / test position)

DB117061.eps



Changeover contacts (6 A - 240 V)	
1 connected position contact (3 max.)	LV833751
1 test position contact (1 max.)	LV833752
1 disconnected position contact (2 max.)	LV833753
And/or low-level changeover contacts	
1 connected position contact (3 max.)	LV833754
1 test position contact (1 max.)	LV833755
1 disconnected position contact (2 max.)	LV833756


Auxiliary terminals for chassis alone

3 wire terminal (30 parts)	LV847071SP
6 wire terminal (10 parts)	LV847072SP
Jumpers (10 parts)	LV847900SP

Remote operation

"Ready to close" contact (1 max.)

DB117059.eps



	PF
1 changeover contact (5 A - 240 V)	LV847432
1 low-level changeover contact	LV847433

Electrical closing pushbutton


DB424640.eps



	BPFE
1 pushbutton	LV847512

Remote reset after fault trip

DB117082.eps




Electrical reset	RES
100/130 V AC	LV847434
200/240 V AC	LV847435
Automatic reset	RAR
Adaptation	LV847346

MTZ1 06 to MTZ1 16 drawout circuit breakers

Remote operation


Remote ON/OFF

Gear motor



AC 50/60 Hz	48 V	MCH
	100/130 V	LV847461
	200/240 V	LV847465
	277/415 V	LV847466
	440/480 V	LV847468
DC	24/30 V	LV847470
	48/60 V	LV847460
	100/130 V	LV847461
	200/250 V	LV847462
		LV847463


Instantaneous voltage releases



		Closing release	Opening release
Standard		XF	MX
AC 50/60 Hz	24/30 V DC, 24 V AC	LV847440	LV833810
	48/60 V DC, 48 V AC	LV847441	LV833811
	100/130 V AC/DC	LV847442	LV833812
	200/250 V AC/DC	LV847443	LV833813
	277 V AC	LV847444	LV833814
DC	380/480 V AC	LV847445	LV833815
Diagnostics & Communicating		XF diag & com	MX diag & com
AC 50/60 Hz	24/30 V DC, 24 V AC	LV847412	LV833792
	48/60 V DC, 48 V AC	LV847413	LV833793
	100/130 V AC/DC	LV847414	LV833794
	200/250 V AC/DC	LV847415	LV833795
	277 V AC	LV847416	LV833796
DC	380/480 V AC	LV847417	LV833797
		Opening release	
Standard		MN	
AC 50/60 Hz	24/30 V DC, 24 V AC	LV833819	
	48/60 V DC, 48 V AC	LV833820	
	100/130 V AC/DC	LV833821	
	200/250 V AC/DC	LV833822	
	380/480 V AC	LV833824	
Diagnostics		MN diag	
AC 50/60 Hz	24/30 V DC, 24 V AC	LV836710	
	48/60 V DC, 48 V AC	LV836711	
	100/130 V AC/DC	LV836712	
	200/250 V AC/DC	LV836713	
	380/480 V AC	LV836714	


Remote tripping

Instantaneous voltage release



AC 50/60 Hz	24/30 V DC, 24 V AC	2 nd MX
	48/60 V DC, 48 V AC	LV847450
	100/130 V AC/DC	LV847451
	200/250 V AC/DC	LV847452
	277 V AC	LV847453
DC	380/480 V AC	LV847454
		LV847455

MN delay unit




		R (non-adjustable)	Rr (adjustable)
AC 50/60 Hz	48/60 V AC/DC		LV833680SP
	100/130 V AC/DC	LV833684SP	LV833681SP
	200/250 V AC/DC	LV833685SP	LV833682SP
	380/480 V AC/DC		LV833683SP

[1] No compatible with any version of MN coils.

Accessories for MTZ1 06 to MTZ1 16 fixed or drawout circuit breakers

Circuit breaker locking


Pushbutton locking device



By padlocks

LV833897


OFF position locking



By padlocks + BPFE support

VCPO

LV847514



By Profalux keylocks

Profalux

1 lock with 1 key + adaptation kit

LV847519

2 locks 1 key + adaptation kit

LV847520

By Ronis keylocks

Ronis

1 lock with 1 key + adaptation kit

LV847521

2 locks 1 key + adaptation kit

LV847522

Adaptation kit

adaptation kit Profalux / Ronis

LV847515SP

(without keylock):


adaptation kit Kirk

LV847517SP

adaptation kit Castell

LV847518SP

Cable-type door interlock



1 complete assembly for MasterPact MTZ1 fixed devices


LV833920SP

1 complete assembly for MasterPact MTZ1 drawout devices

LV833921SP

Mechanical interlocking for source changeover

Interlocking using connecting rods



Choose 1 kit of 2 adaptation fixtures + 1 set of rods

Kit of 2 MasterPact MTZ1 adaptation fixtures for fixed devices

LV833203SP


Kit of 2 MasterPact MTZ1 adaptation fixtures for drawout devices

LV833204SP

1 set of 2 interlocking rods

LV833210SP

Interlocking using cables [1]



Choose 2 adaptation fixtures (1 for each breaker) + 1 set of cables

1 adaptation fixture for MasterPact MTZ1 fixed devices

LV833200SP

1 adaptation fixture for MasterPact MTZ1 drawout devices

LV833201SP


1 set of 2 cables

LV833209SP

[1] Can be used with any combination of MTZ, fixed or drawout devices.

Other circuit breaker accessories


Mechanical operation counter




Operation counter CDM

LV833895


Escutcheon and accessories



Escutcheon



Cover



Blanking plate

Escutcheon

Fixed

Transparent cover (IP54)

LV833718SP

Escutcheon blanking plate

Drawout

LV833857SP

LV833859SP

LV833858SP

Accessories for MTZ1 06 to MTZ1 16 fixed or drawout circuit breakers

Accessories for MicroLogic control units

External sensors

External sensor for earth-leakage protection (TCE)

DB421348.ai		Sensor rating 400/1600 A	LV833576SP

Rectangular sensor for earth-leakage protection

DB421430.eps		280 mm x 115 mm	LV833573SP

Source ground return (SGR) earth fault protection

DB421429.eps		External sensor (SGR)	LV833579SP
		MDGF summing module	LV848891SP

Voltage measurement input (for breakers supplied via bottom terminals)

DB424877.eps		Voltage measurement input	Fixed	LV847506
			Drawout	LV847507

Voltage power supply module (VPS) for MicroLogic X

DB421408.eps				LV850060

Zone Selective Interlocking option for MicroLogic X

ZSI	Standard
-----	----------

External power supply module (AD)

DB432608.eps		24/30 V DC	LV454440
		48/60 V DC	LV454441
		100/125 V DC	LV454442
		110/130 V AC	LV454443
		200/240 V AC	LV454444

Restraint Interface Module - ZSI

DB431951.ai				LV848892SP

Test & Commissioning equipment

USB Cable (miniUSB/USB) for MicroLogic X

DB421409.eps				LV850067SP

Mobile Power Pack for MicroLogic X (by APC)

DB421410.eps				LV850055SP

Special settings

To be specified when ordering

Sensors rating	MTZ1 06	MTZ1 08	MTZ1 10	MTZ1 12	MTZ1 16
400	■	■	■		
630		■	■	■	
800			■	■	■
1000				■	■
1250					■
1600					

Order your breaker


MTZ1 06 to MTZ1 16 fixed switch-disconnectors

Switch-disconnectors

A MasterPact fixed switch-disconnector is described by 3 catalogue numbers corresponding to:

- the basic switch-disconnector
- a top connection
- a bottom connection.

Various auxiliaries and accessories may also be added.



Basic switch-disconnector

Type HA			3P	4P
In (A at 40 °C) Icm (kA peak for U = 220/690 V)				
MTZ1 06	630	60	LV847159	LV847160
MTZ1 08	800	60	LV847161	LV847162
MTZ1 10	1000	60	LV847163	LV847164
MTZ1 12	1250	60	LV847165	LV847166
MTZ1 16	1600	60	LV847167	LV847168

Auxiliaries and accessories:

for fixed devices: see [page I-16](#).


for fixed or drawout devices: see [page I-16](#).

Source changeover assembly: see [page I-16](#).

MTZ1 06 to MTZ1 16 fixed switch-disconnectors


Connections

Front connection

	630-1600 A	Top	3P	4P
		Bottom	LV847328 LV847329	LV847330 LV847331

Front connection accessories

Vertical connection adapters 630-1600 A


	3P (3 parts)	LV833642SP
	4P (4 parts)	LV833643SP

Interphase barriers


	3P/4P top (3 parts)	LV833648SP
	3P/4P bottom (3 parts)	LV833648SP

Rear connection

Vertical connection

	630-1600 A	Top	3P	4P
		Bottom	LV833604 LV833605	LV833614 LV833615

Horizontal connection

	630-1600 A	Top	3P	4P
		Bottom	LV833606 LV833607	LV833616 LV833617

Rear connection accessories

Interphase barriers

	3P/4P top (3 parts)	LV833648SP
	3P/4P bottom (3 parts)	LV833648SP


Common accessories for front and rear connection

Spreaders



630-1600 A 3P 4P	LV833622SP
	LV833623SP
	For front and horizontal rear connection

Cable lug adapters 630-1600 A

	3P (3 parts)	LV833644SP
	4P (4 parts)	LV833645SP


MTZ1 06 to MTZ1 16 drawout switch-disconnectors

Switch-disconnectors

A MasterPact drawout switch-disconnector is described by minimum 4 catalogue numbers corresponding to:

- the basic switch-disconnector
- a chassis with standard terminal blocks
- a top connection
- a bottom connection.

Various auxiliaries and accessories may also be added.

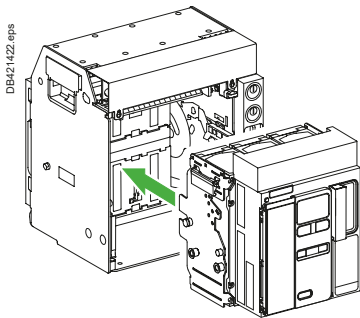

Basic switch-disconnector

Type HA		
	3P	4P
In (A at 40 °C) Icm (kA peak for U = 220/690 V)		
MTZ1 06 630 75	LV847248	LV847249
MTZ1 08 800 75	LV847250	LV847251
MTZ1 10 1000 75	LV847252	LV847253
MTZ1 12 1250 75	LV847254	LV847255
MTZ1 16 1600 75	LV847256	LV847257

Chassis

	3P	4P
630/1250 A	LV833722	LV833725
1600 A	LV833723	LV833726

Chassis terminal blocks

Standard terminal blocks

Each chassis comes equipped in standard with the terminal blocks corresponding to the customer functions below:

- the basic device : OF1, OF2, OF3, OF4, SDE1, UC3 (UC3 for 3P chassis only, not for 4P)
- the MicroLogic control unit : UC1, UC2
- the 5 most common accessories : MN/MX2, MX1, XF, PF, MCH.

Additional terminal blocks

If the device is equipped with one or a combination of the following 3 additional accessories:

- SDE2/RES
- M2C/ESM
- PTE

all the necessary chassis terminal blocks are coded by one of the part numbers below :

Chassis terminal block for PTE	LV839461
Chassis terminal block for SDE2	LV839462
Chassis terminal blocks for PTE + SDE2	LV839463
Chassis terminal block for M2C/ESM	LV839464
Chassis terminal blocks for SDE2 + M2C/ESM	LV839465

Auxiliaries and accessories:

for fixed devices: see [page I-13](#)


for fixed or drawout devices: see [page I-16](#).

Source changeover assembly: see [page I-16](#).

MTZ1 06 to MTZ1 16 drawout switch-disconnectors


Connections

Chassis front connection

	630-1600 A	Top	3P	4P
		Bottom	LV833727	LV833733
			LV833728	LV833734


Front connection accessories

Vertical connection adapters 630-1600 A


	3P (3 parts)	LV833642SP
	4P (4 parts)	LV833643SP

Chassis rear connection

Vertical connection

	630-1600 A	Top	3P	4P
		Bottom	LV833729	LV833735
			LV833730	LV833736

Horizontal connection


	630-1600 A	Top	3P	4P
		Bottom	LV833731	LV833737
			LV833732	LV833738

Rear connection accessories


	Interphase barriers ^[1]		
	3P/4P (3 parts)		LV833768SP
	[1] The same kit covers the top and the bottom connections on the same time.		

Common accessories for front and rear connection

Spreaders

	630-1600 A	3P	LV833622SP
		4P	LV833623SP
	For front and horizontal rear connection		

Cable lug adapters 630-1600 A

	3P (3 parts)	LV833644SP
	4P (4 parts)	LV833645SP


MTZ2 08 to MTZ3 63 fixed circuit breakers

Circuit breakers


A MasterPact fixed circuit breaker is described by 4 catalogue numbers corresponding to:

- the basic circuit breaker
- a control unit
- a top connection
- a bottom connection.

A communication option and various auxiliaries and accessories may also be added.



Basic circuit breaker ≤ 4000 A.

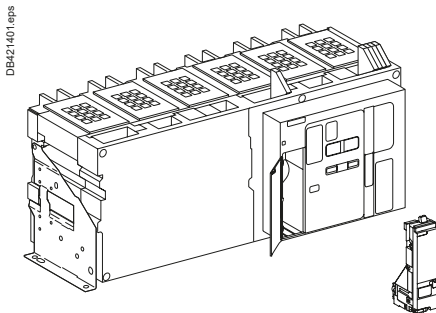

Basic circuit breaker ≥ 4000 A.

Basic circuit breaker

Type N1			
		3P	4P
	In (A at 40 °C) Icu (kA for U = 220/440 V) - Ics = 100 % Icu		
MTZ2 08	800 42	LV848000	LV848007
MTZ2 10	1000 42	LV848014	LV848021
MTZ2 12	1250 42	LV848028	LV848035
MTZ2 16	1600 42	LV848042	LV848049
MTZ2 20	2000 42	LV848056	LV848063

Type H1			
		3P	4P
	In (A at 40 °C) Icu (kA for U = 220/440 V) - Ics = 100 % Icu		
MTZ2 08	800 66	LV848001	LV848008
MTZ2 10	1000 66	LV848015	LV848022
MTZ2 12	1250 66	LV848029	LV848036
MTZ2 16	1600 66	LV848043	LV848050
MTZ2 20	2000 66	LV848057	LV848064
MTZ2 25	2500 66	LV848070	LV848076
MTZ2 32	3200 66	LV848082	LV848087
MTZ2 40	4000 66	LV848092	LV848097
MTZ3 40	4000 100	LV848106	LV848109
MTZ3 50	5000 100	LV848112	LV848115
MTZ3 63	6300 100	LV848118	LV848121

Type H2			
		3P	4P
	In (A at 40 °C) Icu (kA for U = 220/440 V) - Ics = 100 % Icu		
MTZ2 08	800 100	LV848002	LV848009
MTZ2 10	1000 100	LV848016	LV848023
MTZ2 12	1250 100	LV848030	LV848037
MTZ2 16	1600 100	LV848044	LV848051
MTZ2 20	2000 100	LV848058	LV848065
MTZ2 25	2500 100	LV848071	LV848077
MTZ2 32	3200 100	LV848083	LV848088
MTZ2 40	4000 100	LV848093	LV848098
MTZ3 40	4000 150	LV848107	LV848110
MTZ3 50	5000 150	LV848113	LV848116
MTZ3 63	6300 150	LV848119	LV848122

Option			
Neutral on the right			[1]

MicroLogic X control unit

"Class1 IEC 61557-12 certified power meter"		
		3P/4P
MicroLogic 2.0 X	basic protection	LV847280
MicroLogic 5.0 X	selective protection	LV847283
MicroLogic 6.0 X	selective + earth-fault protection	LV847288
MicroLogic 7.0 X [2]	selective + earth-leakage protection	LV847287

Digital modules option

	3P/4P
Energy per phase	LV850002
Power restoration assistant	LV850004
MasterPact operation assistant	LV850005
Individual harmonics analysis	LV850006
ANSI 51N/51G - Ground fault Alarm	LV850007
ERMS - Energy Reducing Maintenance Settings	LV850009
ANSI 32P - Reverse active power protection	LV850011
ANSI 27/59 - Under/Over voltage protection	LV850012
ANSI 81 - Under/Over frequency protection	LV850013
Modbus legacy dataset	LV850045
Waveform capture trip event	LV850003

Communication option

ULP port		LV850061
IFM	Modbus interface	LV434000
IFE	Ethernet interface for LV breaker	LV434001
	Ethernet interface for LV breakers and gateway	LV434002
I/O application module		LV434063

[1] Select a 4P basic circuit breaker with neutral on the right page I-40.

All other catalogue numbers are unchanged.

[2] Only for breaker up to 3200A

Auxiliaries and accessories:

for fixed devices: see page I-33.

for fixed or drawout devices: see page I-33.


Switch-disconnector version: see page I-35.

Source changeover assembly: see page I-33.


MTZ2 08 to MTZ3 63 fixed circuit breakers

Connections

Front connection


	800-1600 A	Top	3P	LV848128	4P	LV848153
		Bottom		LV848130		LV848155
	2000 A	Top		LV848124		LV848126
		Bottom		LV848125		LV848127
	2500/3200 A	Top		LV848129		LV848154
		Bottom		LV848131		LV848156

Front connection accessories


	Disconnectable front connection					
	1600 A		3P	LV848421SP	4P	LV848424SP
	2000/3200 A			LV848422SP		LV848425SP

Rear connection

Vertical connection


	800-2000 A	Top	3P	LV848133	4P	LV848158
		Bottom		LV848138		LV848163
	800-1600 A type L1	Top		LV848134		LV848159
	2500/3200 A	Bottom		LV848139		LV848164
	2000 A types H3/L1	Top		LV848135		LV848160
	4000 A	Bottom		LV848140		LV848165
	4000/5000 A	Top		LV848136		LV848161
		Bottom		LV848141		LV848166
	6300 A	Top		LV848137		LV848162
		Bottom		LV848142		LV848167

Horizontal connection


	800-2000 A	Top	3P	LV848143	4P	LV848168
		Bottom		LV848148		LV848173
	800-1600 A type L1	Top		LV848144		LV848169
	2500/3200 A	Bottom		LV848149		LV848174
	2000 A types H3/L1	Top		LV848145		LV848170
	4000 A	Bottom		LV848150		LV848175
	4000/5000 A	Top		LV848146		LV848171
		Bottom		LV848151		LV848176

Rear connection accessories

Interphase barriers ^[1]

	3P/4P (3 parts)	LV848599SP
	[1] The same kit covers the top and the bottom connections on the same time.	

Brackets for mounting on a backplate

	2 parts	LV847829
---	---------	----------

Grounding kit

Grounding kit for MasterPact MTZ2/MTZ3 fixed	LV848558
--	----------


MTZ2 08 to MTZ3 63 fixed circuit breakers

Indication contacts and remote operation

Indication contacts

ON/OFF indication contacts (OF)

DB404314 eps



Block of 4 changeover contacts (6 A - 240 V)


1 block (standard)

1 additional block of 4 contacts (2 max.)

LV848198

"Fault trip" indication contacts (SDE)

DB424851 eps



Changeover contact (6 A - 240 V)

1 (standard)

1 additional SDE (6 A - 240 V)


LV848200

1 additional low-level SDE

LV848201

Programmable contacts (programmed via MicroLogic X control unit)

DB424852 eps




2 contacts M2C (5 A - 240 V)

LV847403

Remote operation

"Ready to close" contact (1 max.)

DB424853 eps



1 changeover contact (5 A - 240 V)

PF

LV847342

1 low-level changeover contact

LV847343

Electrical closing pushbutton

DB424840 eps




1 pushbutton

BPFE

LV848534

Remote reset after fault trip

DB424851 eps



Electrical reset

RES

100/130 V AC

LV848202

200/240 V AC

LV848203

Automatic reset

RAR

Adaptation


LV847346

MTZ2 08 to MTZ3 63 fixed circuit breakers

Remote operation


Remote ON/OFF

Gear motor



AC 50/60 Hz	48 V	MCH
	100/130 V	LV848207
	200/240 V	LV848211
	250/277 V	LV848212
	380/415 V	LV848213
	440/480 V	LV848214
DC	24/30 V	LV848215
	48/60 V	LV848206
	100/130 V	LV848207
	200/250 V	LV848208
		LV848209


Instantaneous voltage releases



		Closing release	Opening release
Standard		XF	MX
AC 50/60 Hz	24/30 V DC, 24 V AC	LV847350	LV847360
	48/60 V DC, 48 V AC	LV847351	LV847361
	100/130 V AC/DC	LV847352	LV847362
	200/250 V AC/DC	LV847353	LV847363
	277 V AC	LV847354	LV847364
	380/480 V AC	LV847355	LV847365
Diagnostics & Communicating		XF diag & com	MX diag & com
AC 50/60 Hz	24/30 V DC, 24 V AC	LV847311	LV847321
	48/60 V DC, 48 V AC	LV847312	LV847322
	100/130 V AC/DC	LV847313	LV847323
	200/250 V AC/DC	LV847314	LV847324
	277 V AC	LV847315	LV847325
	380/480 V AC	LV847316	LV847326
Standard		Opening release	
		MN	
AC 50/60 Hz	24/30 V DC, 24 V AC	LV847380	
	48/60 V DC, 48 V AC	LV847381	
	100/130 V AC/DC	LV847382	
	200/250 V AC/DC	LV847383	
DC	380/480 V AC	LV847385	
Diagnostic		MN diag	
AC 50/60 Hz	24/30 V DC, 24 V AC	LV836700	
	48/60 V DC, 48 V AC	LV836701	
	100/130 V AC/DC	LV836702	
	200/250 V AC/DC	LV836703	
DC	380/480 V AC	LV836704	


Remote tripping

Instantaneous voltage release



AC 50/60 Hz	24/30 V DC, 24 V AC	2 nd MX
	48/60 V DC, 48 V AC	LV847370
	100/130 V AC/DC	LV847371
	200/250 V AC/DC	LV847372
	277 V AC	LV847373
	380/480 V AC	LV847374
DC		LV847375

Retardateur MN



		R (non-adjustable)	Rr (adjustable)
AC 50/60 Hz	48/60 V AC/DC		LV833680SP
	100/130 V AC/DC	LV833684SP	LV833681SP
	200/250 V AC/DC	LV833685SP	LV833682SP
	380/480 V AC/DC		LV833683SP


MTZ2 08 to MTZ3 63 drawout circuit breakers

Circuit breakers


A MasterPact drawout circuit breaker is described by minimum 5 catalogue numbers corresponding to:

- the basic circuit breaker
- a control unit
- a chassis with standard terminal blocks
- a top connection
- a bottom connection.

A communication option and various auxiliaries and accessories may also be added.

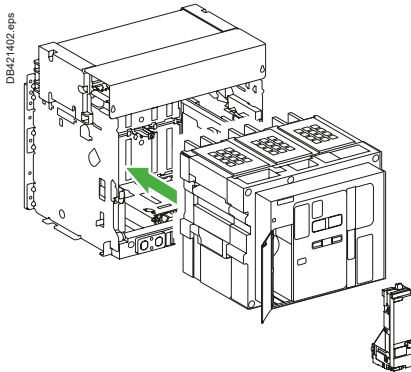

Basic circuit breaker + chassis ≤ 4000 A

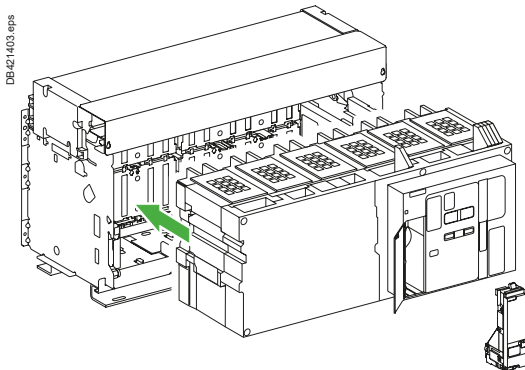

Basic circuit breaker + chassis ≥ 4000 A

Basic circuit breaker

		3P	4P
Type N1			
	In (A at 40 °C)	Icu (kA for U = 220/440 V) - Ics = 100 % Icu	
MTZ2 08	800	42	LV848230
MTZ2 10	1000	42	LV848244
MTZ2 12	1250	42	LV848258
MTZ2 16	1600	42	LV848272
MTZ2 20	2000	42	LV848286
			LV848293

Type H1			
	In (A at 40 °C)	Icu (kA for U = 220/440 V) - Ics = 100 % Icu	
MTZ2 08	800	66	LV848231
MTZ2 10	1000	66	LV848245
MTZ2 12	1250	66	LV848259
MTZ2 16	1600	66	LV848273
MTZ2 20	2000	66	LV848287
MTZ2 25	2500	66	LV848300
MTZ2 32	3200	66	LV848312
MTZ2 40	4000	66	LV848322
MTZ3 40	4000	100	LV848336
MTZ3 50	5000	100	LV848342
MTZ3 63	6300	100	LV848348
			LV848351

Type H2			
	In (A at 40 °C)	Icu (kA for U = 220/440 V) - Ics = 100 % Icu	
MTZ2 08	800	100	LV848232
MTZ2 10	1000	100	LV848246
MTZ2 12	1250	100	LV848260
MTZ2 16	1600	100	LV848274
MTZ2 20	2000	100	LV848288
MTZ2 25	2500	100	LV848301
MTZ2 32	3200	100	LV848313
MTZ2 40	4000	100	LV848323
MTZ3 40	4000	150	LV848337
MTZ3 50	5000	150	LV848343
MTZ3 63	6300	150	LV848349
			LV848352

Type H3			
	In (A at 40 °C)	Icu (kA for U = 220/440 V) - Ics = 100 % Icu	
MTZ2 20	2000	150	LV848289
MTZ2 25	2500	150	LV848302
MTZ2 32	3200	150	LV848314
MTZ2 40	4000	150	LV848324
			LV848329

Type L1			
	In (A at 40 °C)	Icu (kA for U = 220/440 V) - Ics = 100 % Icu	
MTZ2 08	800	150	LV848233
MTZ2 10	1000	150	LV848247
MTZ2 12	1250	150	LV848261
MTZ2 16	1600	150	LV848275
MTZ2 20	2000	150	LV848290
			LV848297

Option		
Neutral on the right		[1]

MicroLogic X control unit

"Class1 IEC 61557-12 certified power meter"		
		3P/4P
MicroLogic 2.0 X	basic protection	LV848498
MicroLogic 5.0 X	selective protection	LV848499
MicroLogic 6.0 X	selective + earth-fault protection	LV848500
MicroLogic 7.0 X ^[2]	selective + earth-leakage protection	LV848362

Digital modules option

	3P/4P
Energy per phase	LV850002
Power restoration assistant	LV850004
MasterPact operation assistant	LV850005
Individual harmonics analysis	LV850006
ANSI 51N/51G - Ground fault Alarm	LV850007
ERMS - Energy Reducing Maintenance Settings	LV850009
ANSI 32P - Reverse active power protection	LV850011
ANSI 27/59 - Under/Over voltage protection	LV850012
ANSI 81 - Under/Over frequency protection	LV850013
Modbus legacy dataset	LV850045
Waveform capture trip event	LV850003

Grounding kit

Grounding kit for MasterPact MTZ2/MTZ3 drawout	LV848559
--	----------


[1] Select a 4P basic circuit breaker with neutral on the right page I-40.

All other catalogue numbers are unchanged.

[2] Only for breaker up to 3200 A.

MTZ2 08 to MTZ3 63 drawout circuit breakers

Chassis



Chassis ≤ 4000 A

Chassis

	3P	4P
For type N1/H1		
800-1600 A	LV848392	LV848404
For type H2		
800-1600 A	LV848393	LV848405
For type N1/H1/H2		
2000 A	LV848393	LV848405
2500 A	LV848394	LV848406
3200 A	LV848395	LV848407
4000 A	LV848396	LV848408
4000/6300 A	LV848397	LV848409
For type H3		
2000/2500 A	LV848394	LV848406
3200 A	LV848395	LV848407
4000 A	LV848396	LV848408
For type L1		
800/1600 A	LV848399	LV848411
2000 A	LV848400	LV848412

Chassis terminal blocks

Standard terminal blocks

Each chassis comes equipped in standard with the terminal blocks corresponding to the customer functions below:

- the basic device : OF1, OF2, OF3, OF4, SDE1, UC3 (UC3 for 3P chassis only, not for 4P)
- the MicroLogic control unit : UC1, UC2
- the 5 most common accessories : MN/MX2, MX1, XF, PF, MCH.

Additional terminal blocks

If the device is equipped with one or a combination of the following 5 additional accessories:

- SDE2/RES
- M2C/ESM
- PTE
- 1st additionnal 4 OF block
- 2nd additionnal 4 OF block

all the necessary chassis terminal blocks are coded by one of the part numbers below :

Chassis terminal blocks for 8 OF contacts	LV839471
Chassis terminal blocks for 4 OF contacts	LV839472
Chassis terminal block for PTE	LV839473
Chassis terminal blocks for PTE + 8 OF contacts	LV839474
Chassis terminal blocks for PTE + 4 OF contacts	LV839475
Chassis terminal block for SDE2/RES	LV839476
Chassis terminal blocks for SDE2/RES + 8 OF contacts	LV839477
Chassis terminal blocks for SDE2/RES + 4 OF contacts	LV839478
Chassis terminal blocks for PTE + SDE2/RES	LV839479
Chassis terminal blocks for PTE + SDE2/RES + 8 OF contacts	LV839480
Chassis terminal blocks for PTE + SDE2/RES + 4 OF contacts	LV839481
Chassis terminal block for M2C/ESM	LV839482
Chassis terminal blocks for M2C/ESM + 8 OF contacts	LV839483
Chassis terminal blocks for M2C/ESM + 4 OF contacts	LV839484
Chassis terminal blocks for PTE + M2C/ESM	LV839485
Chassis terminal blocks for PTE + M2C/ESM + 8 OF contacts	LV839486
Chassis terminal blocks for PTE + M2C/ESM + 4 OF contacts	LV839487
Chassis terminal blocks for SDE2/RES + M2C/ESM	LV839488
Chassis terminal blocks for SDE2/RES + M2C/ESM + 8 OF contacts	LV839489
Chassis terminal blocks for SDE2/RES + M2C/ESM + 4 OF contacts	LV839490
Chassis terminal blocks for PTE + SDE2/RES + M2C/ESM	LV839491
Chassis terminal blocks for PTE + SDE2/RES + M2C/ESM + 8 OF contacts	LV839492
Chassis terminal blocks for PTE + SDE2/RES + M2C/ESM + 4 OF contacts	LV839493

Ethernet communication option

	Chassis +	Circuit breaker (ULP)
ULP port	Standard	Standard
EIFE Embedded Ethernet interface for LV breaker	LV851200	
IFM Modbus interface	LV434000	
IFE Ethernet interface for LV breaker	LV434001	
Ethernet interface for LV breakers and gateway	LV434002	
I/O application module	LV434063	


Auxiliaries and accessories:

- for drawout devices: see [page I-29](#)
 - for fixed or drawout devices: see [page I-33](#).
- Switch-disconnector version: see [page I-35](#).
Source changeover assembly: see [page I-33](#).



MTZ2 08 to MTZ3 63 drawout circuit breakers

Connections

Chassis front connection

	800-1600 A	Top	3P	LV848415	4P	LV848441
		Bottom		LV848418		LV848444
	2000 A	Top		LV848413		LV848417
		Bottom		LV848414		LV848420
	2500/3200 A	Top		LV848416		LV848442
		Bottom		LV848419		LV848445

Chassis rear connection


			3P	4P
Vertical connection				
	800-2000 A	Top	LV848133	LV848158
	800-1600 A type L1	Bottom	LV848138	LV848163
	2500/3200 A	Top	LV848134	LV848159
	2000 A types H3/L1	Bottom	LV848139	LV848164
	4000 A	Top	LV848135	LV848160
		Bottom	LV848140	LV848165
	4000/5000 A (MTZ3)	Top	LV848136	LV848161
		Bottom	LV848141	LV848166
	6300 A (MTZ3)	Top	LV848137	LV848162
Bottom		LV848142	LV848167	
Horizontal connection				
	800-2000 A	Top	LV848143	LV848168
	800-1600 A type L1	Bottom	LV848148	LV848173
	2500/3200 A	Top	LV848144	LV848169
	2000 A types H3/L1	Bottom	LV848149	LV848174
	4000 A	Top	LV848145	LV848170
		Bottom	LV848150	LV848175
	4000/5000 A	Top	LV848146	LV848171
		Bottom	LV848151	LV848176
	Rear connection accessories			
	Interphase barriers ^[1]			
	3P/4P (3 parts)		LV848600SP	
	^[1] The same kit covers the top and the bottom connections on the same time.			

MTZ2 08 to MTZ3 63 drawout circuit breakers

Chassis locking and accessories

Chassis locking

"Disconnected" position locking



By padlocks

VCPO

Standard

By Profalux keylocks

Profalux

1 lock with 1 key + adaptation kit

LV848568

2 locks 1 key + adaptation kit

LV848569

2 locks 2 different keys + adaptation kit

LV848570

By Ronis keylocks

Ronis

1 lock with 1 key + adaptation kit

LV848572

2 locks 1 key + adaptation kit

LV848573

2 locks 2 different keys + adaptation kit

LV848574

Optional disconnected/test/connected position locking

LV833779

Adaptation kit

adaptation kit Profalux / Ronis

LV848564SP

(without keylock):


adaptation kit Kirk

LV848565SP

adaptation kit Castell

LV848566SP

Door interlock (1 part)




Right-hand side of chassis

LV848579

Left-hand side of chassis

LV848580

Racking interlock



1 part

LV848582

Racking interlock between crank and OFF pushbutton


1 part

LV848585


Automatic spring discharge before breaker removal

1 part

LV848554



Breaker mismatch protection



Breaker mismatch protection VDC





LV833767SP

Order your breaker

MTZ2 08 to MTZ3 63 drawout circuit breakers

Chassis locking and accessories

Chassis accessories


Arc chute cover		3P/4P	Standard
			
Auxiliary terminal shield (CB)			
	800/4000 A	3P	LV848595
		4P	LV848596
	4000/6300 A	3P	LV848597
		4P	LV848598
Safety shutters + locking block			
	800/4000 A	3P	Standard
		4P	Standard
	4000/6300 A	3P	Standard
		4P	Standard
Shutter locking block (for replacement)			
	2 parts for 800/4000 A		LV848591SP
Front face shutter position indication and locking			
	800/4000 A	3P/4P	LV848592
	4000/6300 A	3P	LV848593
		4P	LV848594

MTZ2 08 to MTZ3 63 drawout circuit breakers


Indication contacts and remote operation

Indication contacts


ON/OFF indication contacts (OF)

DB404321 eps		Block of 4 changeover contacts (6 A - 240 V)	1 block (standard)
		1 additional block of 4 contacts (2 max.)	LV848468


Combined closed / connected contacts for use with 1 auxiliary contact

DB404322 eps		1 contact (5 A - 240 V) (8 max.)	LV848477
		or 1 low-level contact (8 max.)	LV848478

"Fault trip" indication contacts (SDE)

DB404323 eps		Changeover contact (6 A - 240 V)	1 (standard)
		1 additional SDE (6 A - 240 V)	LV848475
		or 1 additional low-level SDE	LV848476

Programmable contacts (programmed via MicroLogic X control unit)

DB424657 eps		2 contacts M2C (5 A - 240 V)	LV848382
--------------	---	------------------------------	----------

Carriage switches (connected / disconnected / test position)


DB404324 eps		Changeover contacts (8 A - 240 V)	
		1 connected position contact (3 max.)	LV833751
		1 test position contact (3 max.)	LV833752
		1 disconnected position contact (3 max.)	LV833753
		and/or low-level changeover contacts	
		1 connected position contact (3 max.)	LV833754
		1 test position contact (3 max.)	LV833755
		1 disconnected position contact (3 max.)	LV833756
		Actuator for additional carriage switches	LV848560

Auxiliary terminals for chassis alone

3 wire terminal (30 parts)	LV847898SP
6 wire terminal (10 parts)	LV847899SP
Jumpers (10 parts)	LV847900SP

Remote operation

"Ready to close" contact (1 max.)

DB404379 eps			PF
		1 changeover contact (5 A - 240 V)	LV848469
		1 low-level changeover contact	LV848470

Electrical closing pushbutton

DB424640 eps		1 pushbutton	BPFE
			LV848534

Remote reset after fault trip

Electrical reset	RES
100/130 V AC	LV848472
200/240 V AC	LV848473
Automatic reset	RAR
Adaptation	LV847346


MTZ2 08 to MTZ3 63 drawout circuit breakers

Remote operation

Remote ON/OFF

Gear motor

DB424655.eps



AC 50/60 Hz

48 V

MCH

100/130 V

LV848522

200/240 V

LV848526

250/277 V

LV848527

380/415 V

LV848528

440/480 V

LV848529

DC

24/30 V

LV848530

48/60 V

LV848521

100/130 V

LV848522


200/250 V

LV848523

LV848524

Instantaneous voltage releases

DB424659.eps



Standard

AC 50/60 Hz

DC

24/30 V DC, 24 V AC

48/60 V DC, 48 V AC

100/130 V AC/DC

200/250 V AC/DC

277 V AC

380/480 V AC

Closing release

XF

LV848481

LV848482

LV848483

LV848484

LV848485

LV848486

Opening release

MX

LV848491

LV848492

LV848493

LV848494

LV848495

LV848496

Diagnostic & Communicating

AC 50/60 Hz

DC

24/30 V DC, 24 V AC

48/60 V DC, 48 V AC

100/130 V AC/DC

200/250 V AC/DC

277 V AC

380/480 V AC

XF diag & com

LV848449

LV848450

LV848451

LV848452

LV848453

LV848454

MX diag & com

LV848458

LV848459

LV848460

LV848461

LV848462

LV848463

Opening release

MN

Standard

AC 50/60 Hz

DC

24/30 V DC, 24 V AC

48/60 V DC, 48 V AC

100/130 V AC/DC

200/250 V AC/DC

380/480 V AC

LV848501

LV848502

LV848503

LV848504

LV848506

Diagnostic

AC 50/60 Hz

DC

24/30 V DC, 24 V AC

48/60 V DC, 48 V AC

100/130 V AC/DC

200/250 V AC/DC

380/480 V AC

MN diag

LV836705

LV836706

LV836707


LV836708

LV836709

Remote tripping

Instantaneous voltage release

DB424659.eps



AC 50/60 Hz

DC

24/30 V DC, 24 V AC

48/60 V DC, 48 V AC

100/130 V AC/DC

200/250 V AC/DC

277 V AC

380/480 V AC

2nd MX

LV848511

LV848512

LV848513


LV848514

LV848515

LV848516

MN delay unit

DB404320.eps



AC 50/60 Hz

DC

48/60 V AC/DC

100/130 V AC/DC

200/250 V AC/DC

380/480 V AC/DC

R (non-adjustable)

LV833684SP

LV833685SP

Rr (adjustable)

LV833680SP

LV833681SP


LV833682SP

LV833683SP

Accessories for MTZ2 08 to MTZ3 63 fixed and drawout circuit breakers


Circuit breaker locking

Pushbutton locking device



By padlocks	LV848536
-------------	----------

OFF position locking




By padlocks	VCPO	LV848539
By Profalux keylocks		
Profalux	1 lock with 1 key + adaptation kit	LV848545
	2 locks 1 key + adaptation kit	LV848546
	2 locks 2 different keys + adaptation kit	LV848547
By Ronis keylocks		
Ronis	1 lock with 1 key + adaptation kit	LV848549
	2 locks 1 key + adaptation kit	LV848550
	2 locks 2 different keys + adaptation kit	LV848551
Adaptation kit (without keylock):	adaptation kit Profalux / Ronis	LV848541SP
	adaptation kit Kirk	LV848542SP
	adaptation kit Castell	LV848543SP

Cable-type door interlock

1 complete assembly for MasterPact MTZ2/MTZ3 fixed or drawout device	LV848614SP
--	------------

Mechanical interlocking for source changeover


Interlocking of 2 devices using connecting rods



Complete assembly with 2 adaptation fixtures + rods	
1 set of 2 adaptation fixtures for MasterPact MTZ2 or MTZ3 fixed or drawout device	LV847930SP
1 set of 2 interlocking rods	LV833210SP

Note: Can be used with 1 MTZ2/3 fixed + 1 MTZ2/3 drawout.


Interlocking of 2 devices using cables ^[1]



Choose 2 adaptation fixtures (1 for each device) + 1 set of cables	
1 adaptation fixture for MasterPact MTZ2/3 fixed devices	LV847926SP
1 adaptation fixture for MasterPact MTZ2/3 drawout devices	LV847926SP
1 set of 2 cables of 2.5 m	LV833209SP

[1] Can be used with any combination of MTZ, fixed or drawout devices.


Interlocking of 3 devices using cables



Choose 1 interlocking kit (including 3 adaptation fixtures + cables)	
3 sources, only 1 device closed, fixed or drawout devices	LV848610SP
2 sources + 1 coupling, fixed or drawout devices	LV848609SP
2 normal + 1 replacement source, fixed or drawout devices	LV848608SP




Other circuit breaker accessories

Mechanical operation counter



Operation counter CDM	LV848535
-----------------------	----------

Escutcheon and accessories



Escutcheon

Cover

Blanking plate

	Fixed	Drawout
Escutcheon	LV848601SP	LV848603SP
Transparent cover IP54		LV848604SP
Escutcheon blanking plate	LV848605SP	LV848605SP




► For more informations see source-changeover systems catalogue, LVPED216028EN.

Accessories for MTZ2 08 to MTZ3 63 fixed and drawout circuit breakers

Accessories for MicroLogic X control units

External sensors


External sensor for earth-fault protection (TCE)

	Sensor rating	400/2000 A	LV834035SP
		1000/4000 A	LV834036SP
		4000/6300 A (MTZ3)	LV848182SP
	Single sensor kit	2000/6300 A	LV848904SP
	3 layer bus	2000 A	LV848905SP


Rectangular sensor for earth-leakage protection

	280 mm x 115 mm	LV833573SP
	470 mm x 160 mm	LV833574SP


Source ground return (SGR) earth fault protection

	External sensor (SGR)	LV833579SP
	MDGF summing module	LV848891SP

Voltage measurement input (for breakers supplied via bottom terminals)

	Voltage measurement input	Fixed	LV847506
		Drawout	LV848533


Voltage power supply module (VPS) for MicroLogic X

		LV850060
--	--	----------


Zone Selective Interlocking option for MicroLogic X

ZSI	Standard
-----	----------

External power supply module (AD)

	24/30 V DC	LV454440
	48/60 V DC	LV454441
	100/125 V DC	LV454442
	110/130 V AC	LV454443
	200/240 V AC	LV454444

Restraint Interface Module - ZSI

		LV848892SP
---	--	------------

Test and commissioning equipment

USB Cable (miniUSB/USB) for MicroLogic X

		LV850067SP
---	--	------------

Mobile Powerpack for MicroLogic X (by APC)

		LV850055SP
---	--	------------

Special settings

Sensor rating to be specified when ordering

Rating	MTZ2 08	MTZ2 10	MTZ2 12	MTZ2 16	MTZ2 20	MTZ2 25	MTZ2 32
400	■	■					
630	■	■	■				
800		■	■	■			
1000			■				
1250				■			
1600					■		
2000						■	
2500							■
3200							■
Rating	MTZ2 40	MTZ3 40	MTZ3 50	MTZ3 63			
2000	■	■					
2500	■	■	■				
3200	■	■	■	■			
4000			■	■			
5000				■			
6300							


MTZ2 08 to MTZ3 63 fixed switch-disconnectors

Switch-disconnectors


A MasterPact fixed switch-disconnector is described by 3 catalogue numbers corresponding to:

- the basic switch-disconnector
- a top connection
- a bottom connection.

Various auxiliaries and accessories may also be added.



Basic switch-disconnector ≤ 4000 A.

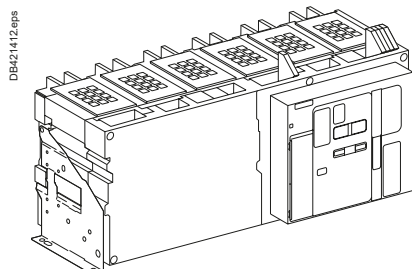

Basic switch-disconnector ≥ 4000 A.

Basic switch-disconnector

Type NA				
			3P	4P
In (A at 40 °C) Icm (kA peak for U = 220/690 V)				
MTZ2 08	800	88	LV848004	LV848011
MTZ2 10	1000	88	LV848018	LV848025
MTZ2 12	1250	88	LV848032	LV848039
MTZ2 16	1600	88	LV848046	LV848053

Type HA				
			3P	4P
In (A at 40 °C) Icm (kA peak for U = 220/690 V)				
MTZ2 08	800	145	LV848005	LV848012
MTZ2 10	1000	145	LV848019	LV848026
MTZ2 12	1250	145	LV848033	LV848040
MTZ2 16	1600	145	LV848047	LV848054
MTZ2 20	2000	145	LV848061	LV848068
MTZ2 25	2500	145	LV848074	LV848080
MTZ2 32	3200	145	LV848085	LV848090
MTZ2 40	4000	145	LV848095	LV848100
MTZ3 40	4000	187	LV848108	LV848111
MTZ3 50	5000	187	LV848114	LV848117
MTZ3 63	6300	187	LV848120	LV848123


MTZ2 08 to MTZ3 63 drawout switch-disconnectors

Switch-disconnectors


A MasterPact drawout switch-disconnector is described by minimum 4 catalogue numbers corresponding to:

- the basic switch-disconnector
- a chassis with standard terminal blocks
- a top connection
- a bottom connection.

Various auxiliaries and accessories may also be added.

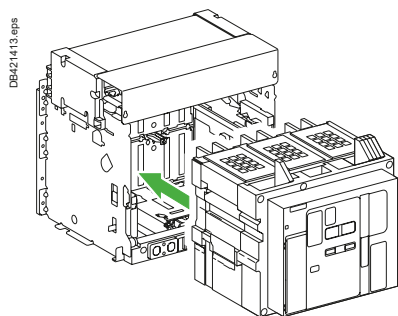

Basic switch-disconnector + chassis ≤ 4000 A.

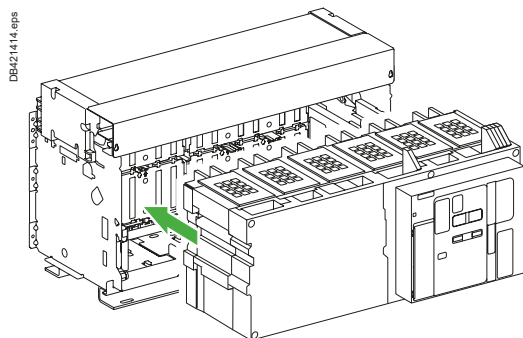

Basic switch-disconnector + chassis ≥ 4000 A.

Basic switch-disconnector

Type NA				3P	4P
In (A at 40 °C) Icm (kA peak for U = 220/690 V)					
MTZ2 08	800	88		LV848234	LV848241
MTZ2 10	1000	88		LV848248	LV848255
MTZ2 12	1250	88		LV848262	LV848269
MTZ2 16	1600	88		LV848276	LV848283

Type HA				3P	4P
In (A at 40 °C) Icm (kA peak for U = 220/690 V)					
MTZ2 08	800	145		LV848235	LV848242
MTZ2 10	1000	145		LV848249	LV848256
MTZ2 12	1250	145		LV848263	LV848270
MTZ2 16	1600	145		LV848277	LV848284
MTZ2 20	2000	145		LV848291	LV848298
MTZ2 25	2500	145		LV848304	LV848310
MTZ2 32	3200	145		LV848315	LV848320
MTZ2 40	4000	145		LV848325	LV848330
MTZ3 40	4000	187		LV848338	LV848341
MTZ3 50	5000	187		LV848344	LV848347
MTZ3 63	6300	187		LV848350	LV848353

Chassis

Type NA			3P	4P
1600 A			LV848392	LV848404

Type HA			3P	4P
800-1600 A			LV848392	LV848404
2000 A			LV848393	LV848405
2500 A			LV848394	LV848406
3200 A			LV848395	LV848407
4000 A			LV848396	LV848408
4000/6300 A (MTZ3)			LV848397	LV848409

MTZ2 08 to MTZ3 63 drawout switch-disconnectors

Switch-disconnectors

Chassis terminal blocks

Standard terminal blocks

Each chassis comes equipped in standard with the terminal blocks corresponding to the customer functions below:

- the basic device : OF1, OF2, OF3, OF4, SDE1, UC3 (UC3 for 3P chassis only, not for 4P)
- the MicroLogic control unit : UC1, UC2
- the 5 most common accessories : MN/MX2, MX1, XF, PF, MCH

Additional terminal blocks

If the device is equipped with one or a combination of the following 5 additional accessories:

- SDE2/RES
- M2C/ESM
- PTE
- 1st additionnal 4 OF block
- 2nd additionnal 4 OF block


all the necessary chassis terminal blocks are coded by one of the part numbers below :

Chassis terminal blocks for 8 OF contacts	LV839471
Chassis terminal blocks for 4 OF contacts	LV839472
Chassis terminal block for PTE	LV839473
Chassis terminal blocks for PTE + 8 OF contacts	LV839474
Chassis terminal blocks for PTE + 4 OF contacts	LV839475
Chassis terminal block for SDE2/RES	LV839476
Chassis terminal blocks for SDE2/RES + 8 OF contacts	LV839477
Chassis terminal blocks for SDE2/RES + 4 OF contacts	LV839478
Chassis terminal blocks for PTE + SDE2/RES	LV839479
Chassis terminal blocks for PTE + SDE2/RES + 8 OF contacts	LV839480
Chassis terminal blocks for PTE + SDE2/RES + 4 OF contacts	LV839481
Chassis terminal block for M2C/ESM	LV839482
Chassis terminal blocks for M2C/ESM + 8 OF contacts	LV839483
Chassis terminal blocks for M2C/ESM + 4 OF contacts	LV839484
Chassis terminal blocks for PTE + M2C/ESM	LV839485
Chassis terminal blocks for PTE + M2C/ESM + 8 OF contacts	LV839486
Chassis terminal blocks for PTE + M2C/ESM + 4 OF contacts	LV839487
Chassis terminal blocks for SDE2/RES + M2C/ESM	LV839488
Chassis terminal blocks for SDE2/RES + M2C/ESM + 8 OF contacts	LV839489
Chassis terminal blocks for SDE2/RES + M2C/ESM + 4 OF contacts	LV839490
Chassis terminal blocks for PTE + SDE2/RES + M2C/ESM	LV839491
Chassis terminal blocks for PTE + SDE2/RES + M2C/ESM + 8 OF contacts	LV839492
Chassis terminal blocks for PTE + SDE2/RES + M2C/ESM + 4 OF contacts	LV839493

MTZ2 08 to MTZ3 63 drawout switch-disconnectors


Connections

Chassis front connection


	800-1600 A	Top	3P	LV848415	4P	LV848441
		Bottom		LV848418		LV848444
	2000 A	Top		LV848413		LV848417
		Bottom		LV848414		LV848420
	2500/3200 A	Top		LV848416		LV848442
		Bottom		LV848419		LV848445

Chassis rear connection

Vertical connection

	800-2000 A	Top	3P	LV848133	4P	LV848158
		Bottom		LV848138		LV848163
	2500/3200 A	Top		LV848134		LV848159
		Bottom		LV848139		LV848164
	4000 A	Top		LV848135		LV848160
		Bottom		LV848140		LV848165
	4000/5000 A	Top		LV848136		LV848161
		Bottom		LV848141		LV848166
	6300 A	Top		LV848137		LV848162
		Bottom		LV848142		LV848167

Horizontal connection

	800-2000 A	Top	3P	LV848143	4P	LV848168
		Bottom		LV848148		LV848173
	2500/3200 A	Top		LV848144		LV848169
		Bottom		LV848149		LV848174
	4000 A	Top		LV848145		LV848170
		Bottom		LV848150		LV848175
	4000/5000 A	Top		LV848146		LV848171
		Bottom		LV848151		LV848176

Rear connection accessories

 DB40/388.eps	Interphase barriers ^[1]	
	3P/4P (3 parts)	LV848600SP
	^[1] The same kit covers the top and the bottom connections on the same time.	

MTZ2 08 to MTZ3 63 circuit breakers with neutral on the right

Circuit breakers

A 4 pole MasterPact circuit breaker with neutral on the right is described by the same catalogue numbers as a standard 4 pole one, except for the basic circuit breaker, which is specific.

Fixed circuit breakers with neutral on the right

Type H1			
	In (A at 40 °C)	Icu (kA for U = 220/440 V) - Ics = 100 %	Icu
MTZ2 08	800	66	LV848183
MTZ2 10	1000	66	LV848184
MTZ2 12	1250	66	LV848185
MTZ2 16	1600	66	LV848186
MTZ2 20	2000	66	LV848060
MTZ2 25	2500	66	LV848073
MTZ2 32	3200	66	LV848187
MTZ2 40	4000	66	LV848193
MTZ3 40	4000	100	LV848194
MTZ3 50	5000	100	LV848195
MTZ3 63	6300	100	LV848196

Type H2			
	In (A at 40 °C)	Icu (kA for U = 220/440 V) - Ics = 100 %	Icu
MTZ2 08	800	100	LV848177
MTZ2 10	1000	100	LV848178
MTZ2 12	1250	100	LV848179
MTZ2 16	1600	100	LV848180
MTZ2 20	2000	100	LV848067
MTZ2 25	2500	100	LV848079
MTZ2 32	3200	100	LV848181
MTZ2 40	4000	100	LV848102
MTZ3 40	4000	150	LV848103
MTZ3 50	5000	150	LV848104
MTZ3 63	6300	150	LV848105

Drawout circuit breakers with neutral on the right

Type H1			
	In (A at 40 °C)	Icu (kA for U = 220/440 V) - Ics = 100 %	Icu
MTZ2 08	800	66	LV848226
MTZ2 10	1000	66	LV848227
MTZ2 12	1250	66	LV848228
MTZ2 16	1600	66	LV848229
MTZ2 20	2000	66	LV848436
MTZ2 25	2500	66	LV848303
MTZ2 32	3200	66	LV848437
MTZ2 40	4000	66	LV848332
MTZ3 40	4000	100	LV848333
MTZ3 50	5000	100	LV848334
MTZ3 63	6300	100	LV848335

Type H2			
	In (A at 40 °C)	Icu (kA for U = 220/440 V) - Ics = 100 %	Icu
MTZ2 08	800	100	LV848426
MTZ2 10	1000	100	LV848427
MTZ2 12	1250	100	LV848428
MTZ2 16	1600	100	LV848429
MTZ2 20	2000	100	LV848438
MTZ2 25	2500	100	LV848309
MTZ2 32	3200	100	LV848439
MTZ2 40	4000	100	LV848354
MTZ3 40	4000	150	LV848355
MTZ3 50	5000	150	LV848356
MTZ3 63	6300	150	LV848357


MTZ2 08 to MTZ2 40 - 1000 V AC

Drawout circuit breakers and switch-disconnectors

A MasterPact 1000 V AC drawout circuit breaker is described by 5 catalogue a corresponding to:

- the basic circuit breaker
- a control unit
- a chassis
- a top connection
- a bottom connection.


A communication option and various auxiliaries and accessories may also be added.

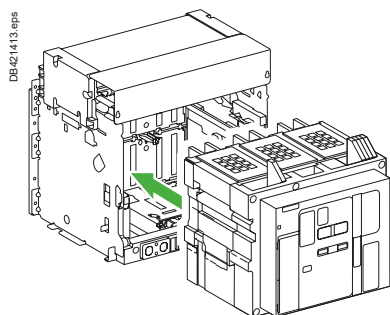

A MasterPact 1000 V AC drawout switch-disconnector is described by 4 catalogue numbers corresponding to:

- the basic switch-disconnector
- a chassis
- a top connection
- a bottom connection.

A communication option and various auxiliaries and accessories may also be added.

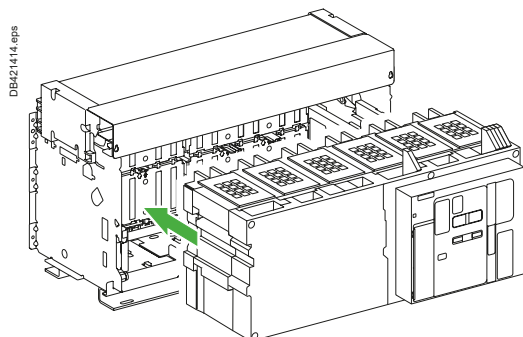

Basic circuit breaker

Type H10			3P	4P
	In (A at 40°C)	Icu (kA for U = 1150 V) - Ics = 100 % Icu		
MTZ2 08	800	50	LV848725	LV848735
MTZ2 10	1000	50	LV848726	LV848736
MTZ2 12	1250	50	LV848727	LV848737
MTZ2 16	1600	50	LV848728	LV848738
MTZ2 20	2000	50	LV848729	LV848739
MTZ2 25	2500	50	LV848730	LV848740
MTZ2 32	3200	50	LV848731	LV848741
MTZ2 40	4000	50	LV848732	LV848742

MicroLogic X control unit

"Class1 IEC 61557-12 certified power meter"			3P/4P
MicroLogic 2.0 X	basic protection		LV848498
MicroLogic 5.0 X	selective protection		LV848499
MicroLogic 6.0 X	selective + earth-fault protection		LV848500

Digital modules option

	3P/4P
Energy per phase	LV850002
Power restoration assistant	LV850004
MasterPact operation assistant	LV850005
Individual harmonics analysis	LV850006
ANSI 51N/51G - Ground fault Alarm	LV850007
ERMS - Energy Reducing Maintenance Settings	LV850009
ANSI 32P - Reverse active power protection	LV850011
ANSI 27/59 - Under/Over voltage protection	LV850012
ANSI 81 - Under/Over frequency protection	LV850013
Modbus legacy dataset	LV850045
Waveform capture trip event	LV850003

Basic switch-disconnector


Type HA10			3P	4P
	In (A at 40°C)	Icm (kA peak for U = 1150 V)		
MTZ2 08	800	105	LV848745	LV848755
MTZ2 10	1000	105	LV848746	LV848756
MTZ2 12	1250	105	LV848747	LV848757
MTZ2 16	1600	105	LV848748	LV848758
MTZ2 20	2000	105	LV848749	LV848759
MTZ2 25	2500	105	LV848750	LV848760
MTZ2 32	3200	105	LV848751	LV848761
MTZ2 40	4000	105	LV848752	LV848762

MTZ2 08 to MTZ2 40 - 1000 V AC

Drawout circuit breakers and switch-disconnectors

Chassis and connections

DE421404.eps



Chassis

	3P	4P
For type H10 and HA10		
800-1600 A	LV848392	LV848404
2000 A	LV848393	LV848405
2500 A	LV848394	LV848406
3200 A	LV848395	LV848407
4000 A	LV848396	LV848408

Chassis terminal blocks

Standard terminal blocks

Each chassis comes equipped in standard with the terminal blocks corresponding to the customer functions below:

- the basic device : OF1, OF2, OF3, OF4, SDE1, UC3 (UC3 for 3P chassis only, not for 4P)
- the MicroLogic control unit : UC1, UC2
- the 5 most common accessories : MN/MX2, MX1, XF, PF, MCH.

Additional terminal blocks

If the device is equipped with one or a combination of the following 5 additional accessories:

- SDE2/RES
- M2C/ESM
- PTE
- 1st additional 4 OF block
- 2nd additional 4 OF block


all the necessary chassis terminal blocks are coded by one of the part numbers below :

Chassis terminal blocks for 8 OF contacts	LV839471
Chassis terminal blocks for 4 OF contacts	LV839472
Chassis terminal block for PTE	LV839473
Chassis terminal blocks for PTE + 8 OF contacts	LV839474
Chassis terminal blocks for PTE + 4 OF contacts	LV839475
Chassis terminal block for SDE2/RES	LV839476
Chassis terminal blocks for SDE2/RES + 8 OF contacts	LV839477
Chassis terminal blocks for SDE2/RES + 4 OF contacts	LV839478
Chassis terminal blocks for PTE + SDE2/RES	LV839479
Chassis terminal blocks for PTE + SDE2/RES + 8 OF contacts	LV839480
Chassis terminal blocks for PTE + SDE2/RES + 4 OF contacts	LV839481
Chassis terminal block for M2C/ESM	LV839482
Chassis terminal blocks for M2C/ESM + 8 OF contacts	LV839483
Chassis terminal blocks for M2C/ESM + 4 OF contacts	LV839484
Chassis terminal blocks for PTE + M2C/ESM	LV839485
Chassis terminal blocks for PTE + M2C/ESM + 8 OF contacts	LV839486
Chassis terminal blocks for PTE + M2C/ESM + 4 OF contacts	LV839487
Chassis terminal blocks for SDE2/RES + M2C/ESM	LV839488
Chassis terminal blocks for SDE2/RES + M2C/ESM + 8 OF contacts	LV839489
Chassis terminal blocks for SDE2/RES + M2C/ESM + 4 OF contacts	LV839490
Chassis terminal blocks for PTE + SDE2/RES + M2C/ESM	LV839491
Chassis terminal blocks for PTE + SDE2/RES + M2C/ESM + 8 OF contacts	LV839492
Chassis terminal blocks for PTE + SDE2/RES + M2C/ESM + 4 OF contacts	LV839493



MasterPact MTZ1

Connection

Connection


			3P	4P
Fixed circuit breakers				
Front connection / Replacement kit (3 or 4 parts)				
 DB404398 eps	Top or bottom	630-1600 A	LV847069SP	LV847070SP

Rear connection (vertical or horizontal mounting) / Replacement kit (3 or 4 parts)



		630-1600 A	LV833584SP	LV833585SP
 DB402835 eps Vert. mounting.	 DB402836 eps Horiz. mounting.			

Drawout circuit breakers

Front connection / Replacement kit (6 or 8 parts)

 DB402860 eps	Top and bottom	630-1600 A	LV833588SP	LV833589SP

Rear connection (vertical or horizontal mounting) / Replacement kit (3 or 4 parts)



		630-1600 A	LV833586SP	LV833587SP
 DB402835 eps Vert. mounting.	 DB402836 eps Horiz. mounting.			

Connection accessories


Vertical connection adapters 630-1600 A / Replacement kit (3 or 4 parts)

		For fixed and drawout front-connected circuit breakers	LV833642SP	LV833643SP
 DB404390 eps				

Cable lug adapters 630-1600 A / Replacement kit (3 or 4 parts)

		For fixed and drawout front-connected circuit breakers	LV833644SP	LV833645SP
 DB404390 eps	 Du380845R al	Threaded rod + spacers for securing the cable lug adapters	04691	04691


Spreaders / Replacement kit 630-1600 A (3 or 4 parts)

		For fixed and drawout front and rear-connected circuit breakers	LV833622SP	LV833623SP
 DB404391 eps				

Interphase barriers / Replacement kit (3 or 4 parts)

		For fixed front and rear-connected circuit breakers ^[1]	LV833648SP	LV833648SP
		For drawout rear-connected circuit breakers ^[2]	LV833768SP	LV833768SP
 DB404392 eps				

Arc chute screen (1 part)

		For fixed front-connected circuit breakers	LV847335SP	LV847336SP
 DB404393 eps				

[1] Take 2 kits: 1 for the top, 1 for the bottom connections.


[2] The same kit covers the top and the bottom connections on the same time.

MasterPact MTZ1

MicroLogic X control unit, communication option, accessories

Replacement parts for MicroLogic X control units


MicroLogic X embedded display (EHMI)



MicroLogic X embedded display & wireless card

LV850054SP

MicroLogic X Battery + Transparent cover




Battery (1 part)

LV833593SP

Transparent Cover (1 part) For MicroLogic X

LV850053SP


Voltage power supply module (VPS) for MicroLogic X



Voltage power supply module (VPS) for MicroLogic X

LV850060SP

Communication option



EIFE Embedded Ethernet interface for LV breaker

LV851100SP

IFM Modbus interface

LV434000

IFE Ethernet interface LV breaker

LV434001

Ethernet interface for LV breakers and gateway

LV434002

I/O application module

LV434063

Microswitches for MTZ1

LV847906SP

Accessories

External sensors

External sensor for earth-fault protection (TCE) / 1 part



Sensor rating 400/1600 A

LV833576SP

Source ground return (SGR) earth-fault protection / 1 part




External sensor (SGR)

LV833579SP

MDGF summing module

LV848891SP


Rectangular sensor for earth-leakage protection + Vigi cable / 1 part (up to 3200 A)



280 mm x 115 mm

LV833573SP

External power supply module (AD) / 1 part



24-30 V DC

LV454440

48-60 V DC

LV454441

100-125 V DC

LV454442

110-130 V AC

LV454443

200-240 V AC

LV454444

USB Cable (miniUSB/USB) for MicroLogic X / 1 part



USB Cable (miniUSB/USB) for MicroLogic X / 1 part

LV850067SP

Mobile Powerpack for MicroLogic X (by APC) / 1 part



Mobile Powerpack for MicroLogic X (by APC) / 1 part


LV850055SP

MasterPact MTZ1

Remote operation


Remote operation

Gear motor




MCH (1 part)

AC 50/60 Hz	48 V	LV833186SP
	100/130 V	LV833176SP
	200/240 V	LV833177SP
	277/415 V	LV833179SP
	440/480 V	LV833179SP
	+ resistor	LV833193SP
DC	24/30 V	LV833185SP
	48/60 V	LV833186SP
	100/125 V	LV833187SP
	200/250 V	LV833188SP
		LV847074SP
Terminal block (1 part)		LV833098SP
		For fixed circuit breaker
		For drawout circuit breaker (if necessary)




Fixed.



Drawout.

Closing and opening release (XF or MX)



Standard coil (1 part)


AC 50/60 Hz	24/30 V DC, 24 V AC	LV833659SP
	48/60 V DC, 48 V AC	LV833660SP
DC	100/130 V AC/DC	LV833661SP
	200/250 V AC/DC	LV833662SP
	277 V AC	LV833663SP
	380/480 V AC	LV833664SP

Diagnostics & Communicating coil (1 part)

AC 50/60 Hz	24/30 V DC, 24 V AC	LV833033SP
	48/60 V DC, 48 V AC	LV833034SP
DC	100/130 V AC/DC	LV833035SP
	200/250 V AC/DC	LV833036SP
	277 V AC	LV833037SP
	380/480 V AC	LV833038SP
	Wiring kit for diag & com coil	LV833118SP
Terminal block (1 part)		LV847074SP
		For fixed circuit breaker
		For drawout circuit breaker (if necessary)
		LV833098SP



Fixed.



Drawout.

Undervoltage release MN



Undervoltage release (1 part)


AC 50/60 Hz	24/30 V DC, 24 V AC	LV833668SP
	48/60 V DC, 48 V AC	LV833669SP
DC	100/130 V AC/DC	LV833670SP
	200/250 V AC/DC	LV833671SP
	380/480 V AC	LV833673SP

Diagnostics coil (1 part)

AC 50/60 Hz	24/30 V DC, 24 V AC	LV833668SP
	48/60 V DC, 48 V AC	LV833669SP
DC	100/130 V AC/DC	LV833670SP
	200/250 V AC/DC	LV833671SP
	380/480 V AC	LV833673SP
	Wiring kit for diag & com coil	LV833118SP
		LV847074SP
Terminal block (1 part)		LV833098SP
		For fixed circuit breaker
		For drawout circuit breaker (if necessary)



Fixed.




Drawout.

Voltage releases securing fixture

Voltage releases securing fixture for MX/XF/MN	LV847093SP
--	------------

MN delay unit



MN delay unit (1 part)


AC 50/60 Hz	48/60 V AC/DC	R (non-adjustable)	Rr (adjustable)
	100/130 V AC/DC	LV833684SP	LV833681SP
DC	200/250 V AC/DC	LV833685SP	LV833682SP
	380/480 V AC/DC		LV833683SP

MasterPact MTZ1

Chassis locking and accessories


Chassis locking

"Disconnected" position locking / 1 part



By padlocks		VCPO	Standard
By Profalux keylocks			
Profalux	1 lock with 1 key + adaptation kit		LV864909SP
	2 locks 1 key + adaptation kit		LV864910SP
	2 locks 2 different keys + adaptation kit		LV864911SP
1 keylock Profalux (without adaptation kit):	identical key not identified combination		LV833173SP
	identical key identified 215470 combination		LV833174SP
	identical key identified 215471 combination		LV833175SP
By Ronis keylocks			
Ronis	1 lock with 1 key + adaptation kit		LV864912SP
	2 locks 1 key + adaptation kit		LV864913SP
	2 locks 2 different keys + adaptation kit		LV864914SP
1 keylock Ronis (without adaptation kit):	identical key not identified combination		LV833189SP
	identical key identified EL24135 combination		LV833190SP
	identical key identified EL24153 combination		LV833191SP
	identical key identified EL24315 combination		LV833192SP
Adaptation kit (without keylock):	adaptation kit Profalux/Ronis		LV833769SP
	adaptation kit Castell		LV833771SP
	adaptation kit Kirk		LV833772SP

Door interlock / 1 part




Right and left-hand side of chassis (VPECD or VPECG)	LV833172SP
--	------------

Racking interlock / 1 part



Racking interlock (VPOC)	LV833788SP
--------------------------	------------


Breaker mismatch protection / 1 part



Breaker mismatch protection (VDC)	LV833767SP
-----------------------------------	------------


Chassis accessories

Auxiliary terminal shield (CB) / 1 part



Terminal shield	3P	LV833763SP
	4P	LV833764SP

Safety shutters + locking / 1 part



Safety shutters (VO)	3P	LV833765SP
	4P	LV833766SP


Note: the locking of safety shutters is integrated.

Order your breaker: spare parts

MasterPact MTZ1

Clusters - NT chassis retrofit to MTZ1


Clusters



Kit of 6 disconnecting contact clusters for chassis (see table below)	LV864906SP
---	------------


Table : number of clusters required for the different chassis models

Chassis rating (A)	MasterPact MTZ1	
	3P	4P
630	12	18
800	12	18
1000	12	18
1250	12	18
1600	18	24




Set of 2 clusters fitters for 2 and 3 clusters	47554
--	-------

Racking handle / 1 part



Racking handle	LV847098SP
----------------	------------

NT chassis retrofit to MTZ1



Kit for retrofitting an NT chassis for MTZ1 moving part	LV850066SP
For more information: retrofit kit instruction sheet (QGH31933)	


Order your breaker: spare parts

MasterPact MTZ1

Circuit breaker locking and accessories


Circuit breaker locking

Pushbutton locking device / 1 part




By padlocks	LV833897SP
-------------	------------

OFF position locking / 1 part



By padlocks + BPFE support	LV847514SP
----------------------------	------------



By Profalux keylocks + support


Profalux	1 lock with 1 key + adaptation kit	LV864918SP
	2 locks 1 key + adaptation kit	LV864919SP
1 keylock Profalux (without adaptation kit):	identical key not identified combination	LV833173SP
	identical key identified 215470 combination	LV833174SP
	identical key identified 215471 combination	LV833175SP

By Ronis keylocks + support

Ronis	1 lock with 1 key + adaptation kit	LV864920SP
	2 locks 1 key + adaptation kit	LV864921SP
1 keylock Ronis (without adaptation kit):	identical key not identified combination	LV833189SP
	identical key identified EL24135 combination	LV833190SP
	identical key identified EL24153 combination	LV833191SP
	identical key identified EL24315 combination	LV833192SP
Adaptation kit (without keylock):	adaptation kit Profalux / Ronis	LV847515SP
	adaptation kit Kirk	LV847517SP
	adaptation kit Castell	LV847518SP




Other circuit breaker accessories

Mechanical operation counter / 1 part



Operation counter CDM	LV833895SP
-----------------------	------------

Escutcheon and accessories / 1 part




	Fixed	Drawout
Escutcheon	LV833718SP	LV833857SP
Transparent cover (IP54)		LV833859SP
Escutcheon blanking plate		LV833858SP

Escutcheon

Cover

Blanking plate

Front cover (3P) / 1 part




Front cover	LV847094SP
-------------	------------

Spring charging handle / 1 part



Spring charging handle	LV847092SP
------------------------	------------

Arc chute for MasterPact MTZ1 / 1 part



	3P	4P
Type H1/H2/HA	3 x LV846737SP	4 x LV846737SP
Type L1	3 x LV847095SP	4 x LV847095SP


Order your breaker: spare parts

MasterPact MTZ1

Mechanical interlocking for source changeover

Mechanical interlocking for source changeover


Interlocking using connecting rods



Choose 1 set of 2 adaptation fixtures + 1 set of rods	
1 set of 2 adaptation fixtures for MasterPact MTZ1 fixed devices	LV833203SP
1 set of 2 adaptation fixtures for MasterPact MTZ1 drawout devices	LV833204SP
1 set of 2 interlocking rods	LV833210SP

Note: the installation manual is enclosed.


Interlocking using cables ^[1]



Choose 2 adaptation fixtures (1 for each device) + 1 set of cables	
1 adaptation fixture for MasterPact MTZ1 fixed devices	LV833200SP
1 adaptation fixture for MasterPact MTZ1 drawout devices	LV833201SP
1 set of 2 cables	LV833209SP

[1] Can be used with any combination of MTZ1 or MTZ2/3, fixed or drawout devices.

Cable-type door interlock



1 complete assembly for MasterPact MTZ1 fixed devices	LV833920SP
1 complete assembly for MasterPact MTZ1 drawout devices	LV833921SP


Note: the installation manual is enclosed.

MasterPact MTZ1

Indication contacts


Indication contacts

ON/OFF indication contacts (OF) / 1 part



Changeover contacts (6 A - 240 V)	LV847076SP
1 low-level OF to replace 1 standard OF (4 max.)	LV847077SP
Wiring For fixed circuit breaker	LV847074SP
For drawout circuit breaker (if necessary)	LV833098SP

"Ready to close" contact (1 max.) / 1 part



	PF
1 changeover contact (6 A - 240 V)	LV847080SP
1 low-level changeover contact	LV847081SP
Wiring For fixed circuit breaker	LV847074SP
For drawout circuit breaker (if necessary)	LV833098SP

Electrical closing pushbutton / 1 part




	BPFE
1 pushbutton	LV864917SP

Carriage switches (connected / disconnected / test position) / 1 part



Changeover contacts (6 A - 240 V)	
1 connected position contact (3 max.)	LV833170SP
1 test position contact (1 max.)	LV833170SP
1 disconnected position contact (2 max.)	LV833170SP
And/or low-level changeover contacts	
1 connected position contact (3 max.)	LV833171SP
1 test position contact (1 max.)	LV833171SP
1 disconnected position contact (2 max.)	LV833171SP

Auxiliary terminals for chassis alone



3 wire terminal (1 part), terminal block (1 part)	LV833098SP
6 wire terminal (1 part), terminal block (1 part)	LV833099SP
Jumpers (10 parts)	LV847900SP

Auxiliary terminals for fixed circuit breaker



3 wire terminal block (1 part)	LV847074SP
6 wire terminal block (1 part)	LV847075SP

MasterPact MTZ1

Communication, monitoring and control

Communication option

	EIFE	Embedded Ethernet module full spare part kit for MTZ1-drawout	LV851100SP
		Embedded ethernet Spare Part module for MTZ1/2/3-drawout	LV851001SP
	IFM	Modbus interface	LV434000
	IFE	Ethernet interface LV breaker	LV434001
		Ethernet interface for LV breakers and gateway	LV434002
	Microswitches for MTZ1		LV847906SP
	I/O application module		LV434063
	EIFE Accessories spare part kit for MTZ1-drawout		LV851120SP

ULP port modules


	ULP port - for MasterPact MTZ1 - fixed	LV850063SP
	ULP port - for MasterPact MTZ1 - drawout	LV850064SP

Accessories for Diagnostics & Communicating Releases

	Isolation module - for MX1/XF communicating coils	LV850056SP
---	---	-------------------

Monitoring and control

Ethernet display module

	Switchboard front display module FDM128	LV434128
--	---	-----------------

ULP wiring accessories ^[1]













	Breaker ULP cord L = 0.35 m	LV434195
	Breaker ULP cord L = 1.3 m	LV434196
	Breaker ULP cord L = 3 m	LV434197
	Breaker ULP cord L = 5 m	LV434198
	Connector Modbus adaptor	LV434211
	10 Modbus line terminators	VW3A8306DRC ^[2]
	5 RJ45 connectors female/female	TRV00870
	10 ULP line terminators	TRV00880
	10 RJ45/RJ45 male cord L = 0.3 m	TRV00803
	10 RJ45/RJ45 male cord L = 0.6 m	TRV00806
	5 RJ45/RJ45 male cord L = 1 m	TRV00810
	5 RJ45/RJ45 male cord L = 2 m	TRV00820
	5 RJ45/RJ45 male cord L = 3 m	TRV00830
	1 RJ45/RJ45 male cord L = 5 m	TRV00850

[1] For measurement display with MicroLogic x.

[2] See www.schneider-electric.com.

MasterPact MTZ2/3

Connection


Connection			3P	4P
Fixed circuit breakers				
Front connection / Replacement kit (3 or 4 parts)				
	800-1600 A	Top	LV847990SP	LV847991SP
	2000/3200 A	Top	LV847992SP	LV847993SP
	800-1600 A	Bottom	LV847932SP	LV847933SP
	2000/3200 A	Bottom	LV847942SP	LV847943SP
Rear connection (vertical or horizontal mounting) / Replacement kit (3 or 4 parts)				
	800-2000 A	Vertical	LV847964SP	LV847965SP
		Horizontal	LV847964SP	LV847965SP
	2500/3200 A	Vertical	LV847966SP	LV847967SP
		Horizontal	LV847966SP	LV847967SP
	4000 A	Vertical	LV847968SP	LV847969SP
		Horizontal	LV847970SP	LV847971SP
	4000b/5000 A	Vertical	2x LV847966SP	2x LV847967SP
		Horizontal	2x LV847966SP	2x LV847967SP
	6300 A	Vertical	2x LV847968SP	2x LV847969SP
Drawout circuit breakers				
Front connection / Replacement kit (3 or 4 parts)				
	800-1600 A	Top or bottom	LV847960SP	LV847961SP
	2000/3200 A	Top or bottom	LV847962SP	LV847963SP
Rear connection (vertical or horizontal mounting) / Replacement kit (3 or 4 parts)				
	800-2000 A types N1/H1/H2	Vertical	LV847964SP	LV847965SP
	800-1600 A types H3/L1	Horizontal	LV847964SP	LV847965SP
	2500/3200 A types H1/H2	Vertical	LV847966SP	LV847967SP
	2000/3200 A types H3/L1	Horizontal	LV847966SP	LV847967SP
	4000 A	Vertical	LV847968SP	LV847969SP
		Horizontal	LV847970SP	LV847971SP
	4000b/5000 A	Vertical	2x LV847966SP	2x LV847967SP
		Horizontal	2x LV847966SP	2x LV847967SP
	6300 A	Vertical	2x LV847968SP	2x LV847969SP
Connection accessories			3P	4P
Disconnectable front-connection adapter for fixed circuit breaker (3 or 4 parts)				
	1600 A		LV848421SP	LV848424SP
	2000/3200 A		LV848422SP	LV848425SP
Interphase barriers / Replacement kit (3 parts)				
	For fixed rear-connected circuit breaker		LV848599SP	LV848599SP
	For drawout rear-connected circuit breaker		LV848600SP	LV848600SP
Additional support brackets for mounting on a backplate				
	For fixed rear-connected circuit breaker (2 parts)			LV847829SP
Grounding kit KTM				
	Grounding kit for MasterPact MTZ2/3 fixed			
	Side plate kit			LV848556SP
	Device earthing kit			LV848557SP
	Grounding kit for MasterPact MTZ2/3 drawout			LV848557SP

MasterPact MTZ2/3

MicroLogic X control unit, communication option, accessories


Replacement parts for MicroLogic X control units

MicroLogic X embedded display (EHMI)




MicroLogic X embedded display & wireless card	LV850054SP
---	------------

MicroLogic X Battery + Transparent cover




Battery (1 part)	LV833593SP
Transparent Cover (1 part) for MicroLogic X	LV850053SP

Voltage power supply module (VPS) for MicroLogic X



Voltage power supply module (VPS) for MicroLogic X	LV850060SP
--	------------

Communication option




EIFE	Embedded Ethernet interface for LV breaker	LV851200SP
IFM	Modbus interface	LV434000
IFE	Ethernet interface LV breaker	LV434001
	Ethernet interface for LV breakers and gateway	LV434002
	I/O application module	LV434063
	Microswitches for MTZ2/3	LV847905SP

Accessories


External sensors

External sensor for earth-fault protection (TCE) / 1 part




Sensor rating	400/2000 A	LV834035SP
	1000/4000 A	LV834036SP
	4000/6300 A (MTZ3)	LV848182SP
Single sensor kit	2000/6300 A	LV848904SP
3 layer bus	2000 A	LV848905SP

Source ground return (SGR) earth-fault protection / 1 part




External sensor (SGR)	LV833579SP
MDGF summing module	LV848891SP

Rectangular sensor for earth-leakage protection + Vigi cable / 1 part (up to 3200 A)



280 mm x 115 mm	LV833573SP
470 mm x 160 mm	LV833574SP

External power supply module (AD) / 1 part



24-30 V DC	LV454440
48-60 V DC	LV454441
100-125 V DC	LV454442
110-130 V AC	LV454443
200-240 V AC	LV454444

USB Cable (miniUSB/USB) for MicroLogic X / 1 part



USB Cable (miniUSB/USB) for MicroLogic X / 1 part	LV850067SP
---	------------

Mobile Powerpack for MicroLogic X (by APC) / 1 part





Mobile Powerpack for MicroLogic X (by APC) / 1 part	LV850055SP
---	------------

MasterPact MTZ2/3

Remote operation

Remote operation



Gear motor

	MCH (1 part)		
	AC 50/60 Hz	48 V	LV847889SP
		100/130 V	LV847893SP
		200/240 V	LV847894SP
		277/415 V	LV847895SP
		440/480 V	LV847896SP
	DC	+ resistor	LV847897SP
		24/30 V	LV847888SP
		48/60 V	LV847889SP
		100/125 V	LV847890SP
		200/250 V	LV847891SP
			LV847074SP
	Terminal block (1 part)	For fixed circuit breaker	LV847849SP
		For drawout circuit breaker (if necessary)	LV847849SP

Fixed.

Drawout.



Closing and opening release (XF or MX)

	Standard coil (1 part)		
	AC 50/60 Hz	24/30 V DC, 24 V AC	LV833659SP
	DC	48/60 V DC, 48 V AC	LV833660SP
		100/130 V AC/DC	LV833661SP
		200/250 V AC/DC	LV833662SP
		277 V AC	LV833663SP
		380/480 V AC	LV833664SP
	Diagnostics & Communicating coil (1 part) ^[1]		
	AC 50/60 Hz	24/30 V DC, 24 V AC	LV833033SP
	DC	48/60 V DC, 48 V AC	LV833034SP
		100/130 V AC/DC	LV833035SP
		200/250 V AC/DC	LV833036SP
		277 V AC	LV833037SP
		380/480 V AC	LV833038SP
	Terminal block (1 part)		
		Wiring kit for diag & com coil	LV847904SP
		For fixed circuit breaker	LV847074SP
		For drawout circuit breaker (if necessary)	LV847849SP

Fixed.

Drawout.

Undervoltage release MN

	Undervoltage release (1 part)		
	AC 50/60 Hz	24/30 V DC, 24 V AC	LV833668SP
		48/60 V DC, 48 V AC	LV833669SP
		100/130 V AC/DC	LV833670SP
		200/250 V AC/DC	LV833671SP
		380/480 V AC	LV833673SP
	DC		
	Diagnostics coil (1 part) ^[1]	24/30 V DC, 24 V AC	LV836668SP
		48/60 V DC, 48 V AC	LV836669SP
		100/130 V AC/DC	LV836670SP
		200/250 V AC/DC	LV836671SP
		380/480 V AC	LV836673SP
		Wiring kit for diag & com coil	LV847904SP
	Terminal block (1 part)	For fixed circuit breaker	LV847074SP
		For drawout circuit breaker (if necessary)	LV847849SP


Fixed.

Drawout.

Voltage releases securing fixture

Voltage releases securing fixture for MX/XF/MN	LV847093SP
--	------------

MN delay unit

	MN delay unit (1 part)		
	AC 50/60 Hz	R (non-adjustable)	Rr (adjustable)
			LV833680SP
		LV833684SP	LV833681SP
		LV833685SP	LV833682SP
DC			LV833683SP


[1] Diagnostics & Communicating coils (MX/XF/MN) requires additionally the isolation module if isn't installed in breaker -1 module by breaker.

MasterPact MTZ2/3

Chassis locking and accessories

Chassis locking

"Disconnected" position locking / 1 part



By padlocks

VCPO	Standard
------	----------


By Profalux keylocks

Profalux	1 lock with 1 key + adaptation kit	LV864934SP
	2 locks 1 key + adaptation kit	LV864935SP
	2 locks 2 different keys + adaptation kit	LV864936SP
1 keylock Profalux (without adaptation kit):	identical key not identified combination	LV833173SP
	identical key identified 215470 combination	LV833174SP
	identical key identified 215471 combination	LV833175SP

By Ronis keylocks


Ronis	1 lock with 1 key + adaptation kit	LV864937SP
	2 locks 1 key + adaptation kit	LV864938SP
	2 locks 2 different keys + adaptation kit	LV864939SP
1 keylock Ronis (without adaptation kit):	identical key not identified combination	LV833189SP
	identical key identified EL24135 combination	LV833190SP
	identical key identified EL24153 combination	LV833191SP
	identical key identified EL24315 combination	LV833192SP
Adaptation kit (without keylock):	adaptation kit Profalux / Ronis	LV848564SP
	adaptation kit Kirk	LV848565SP
	adaptation kit Castell	LV848566SP

Door interlock / 1 part




Right and left-hand side of chassis (VPECD or VPECG)	LV847914SP
--	------------

Racking interlock



5 parts	LV864940SP
---------	------------


Breaker mismatch protection / 1 part



Breaker mismatch protection (VDC)	LV833767SP
-----------------------------------	------------


Chassis accessories

Auxiliary terminal shield (CB) / 1 part




MTZ2 800/4000 A	3P	LV864942SP
	4P	LV848596SP
MTZ3 4000/6300 A	3P	LV848597SP
	4P	LV848598SP

Safety shutters + locking block / 1 part




MTZ2 800/4000 A	3P	LV848721SP
	4P	LV848723SP
MTZ3 4000/6300 A	3P	LV848722SP
	4P	LV848724SP

Shutter locking block (for replacement) / 1 part



2 parts for 800/4000 A	LV848591SP
------------------------	------------

Front face shutter position indication and locking




MTZ2 800/4000 A	3P	LV848592SP
MTZ3 4000/6300 A	3P	LV848593SP
	4P	LV848594SP

MasterPact MTZ2/3

Clusters - NW chassis retrofit to MTZ2/MTZ3

Clusters




Kit of 6 disconnecting contact clusters for chassis (see table below)

LV864906SP

Table : number of clusters required for the different chassis models


	MasterPact MTZ2-3 3P						MasterPact MTZ2-3 4P					
	N1, NA	H1, HA	H10, HA10	H2, HF	H3	L1	N1, NA	H1, HA	H10, HA10	H2, HF	H3	L1
MTZ2 08 to 16	12	12	12	24		24	16	16	16	32		32
MTZ2 20	24	24	24	24	24	42	32	32	32	32	32	56
MTZ2 25		24	24	24	24			32	32	32	32	
MTZ2 32		36	36	36	36			48	48	48	48	
MTZ2 40		42	42	42	42			56	56	56	56	
MTZ3 40 to 50		72		72				96		96		
MTZ3 63		72		72				96		96		



Set of 2 clusters fitters for 2 and 3 clusters

47554

Racking handle




Racking handle


LV847944SP

Raking terminals for converting a fixed into a drawout circuit breaker (for 1 pole = top + bottom)

Device type	Quantity to be ordered		Part number
	3P	4P	
MTZ2 08-16 N1/NA/H1/HA	3	4	LV847908SP
MTZ2 20 N1 - MTZ2 20-25 H1/H2/HA	3	4	LV847909SP
MTZ2 32-40 H1/H2/HA	3	4	LV847912SP

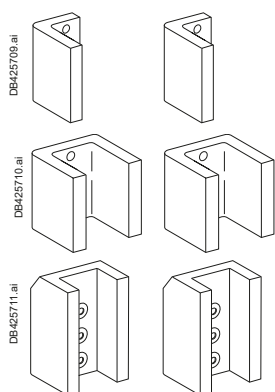

NW chassis retrofit to MTZ2/MTZ3



Kit for retrofitting an NW chassis for MTZ2/3 moving part

LV850065SP


For more information: retrofit kit instruction sheet ([QGH31931](#))

MasterPact MTZ2/3

Circuit breaker locking and accessories

Circuit breaker locking


Pushbutton locking device / 1 part



By padlocks

LV848536SP

OFF position locking / 1 part



By padlocks

LV848539SP

By Profalux keylocks

Profalux

1 lock with 1 key + adaptation kit

LV864928SP

2 locks 1 key + adaptation kit

LV864929SP

2 locks 2 different keys + adaptation kit

LV864930SP

1 keylock Profalux
(without adaptation kit):

identical key not identified combination

LV833173SP

identical key identified 215470 combination

LV833174SP

identical key identified 215471 combination

LV833175SP

By Ronis keylocks

Ronis

1 lock with 1 key + adaptation kit

LV864931SP

2 locks 1 key + adaptation kit

LV864932SP

2 locks 2 different keys + adaptation kit

LV864933SP

1 keylock Ronis
(without adaptation kit):

identical key not identified combination

LV833189SP

identical key identified EL24135 combination

LV833190SP

identical key identified EL24153 combination

LV833191SP

identical key identified EL24315 combination

LV833192SP

Adaptation kit
(without keylock):

adaptation kit Profalux / Ronis

LV848541SP

adaptation kit Kirk


LV848542SP

adaptation kit Castell

LV848543SP

Other circuit breaker accessories




Mechanical operation counter / 1 part



Operation counter CDM

LV848535SP

Escutcheon and accessories / 1 part




	Fixed	Drawout
Escutcheon	LV848601SP	LV848603SP
Transparent cover (IP 54)		LV848604SP
Escutcheon blanking plate	LV848605SP	LV848605SP

Escutcheon

Cover

Blanking plate

Front cover (3P / 4P) / 1 part



Front cover

LV847939SP


Spring charging handle / 1 part



Spring charging handle

LV847940SP

Arc chute for MasterPact MTZ2/3 / 1 part




	3P	4P
Type N1/NA/HF	3 x LV847935SP	4 x LV847935SP
Type H1/H2/HA (MTZ2 08 to MTZ2 40)	3 x LV847935SP	4 x LV847935SP
Type H1/H2/HA (MTZ3 40 to MTZ3 63)	6 x LV847936SP	8 x LV847936SP
Type H3	3 x LV847936SP	4 x LV847936SP
Type H10/HA10	3 x LV847869SP	4 x LV847869SP
Type L1	3 x LV847937SP	4 x LV847937SP

MasterPact MTZ2/3

Mechanical interlocking for source changeover

Mechanical interlocking for source changeover

Interlocking of 2 devices using connecting rods



Choose 1 set of 2 adaptation fixtures (1 for each device) + 1 set of rods

1 set of 2 adaptation fixtures for MasterPact MTZ2 or MTZ3 fixed or drawout device

LV847930SP


1 set of 2 interlocking rods

LV833210SP

Can be used with 1 MTZ2/3 fixed + 1 MTZ2/3 drawout.

Note: the installation manual is enclosed.

Interlocking of 2 devices using cables ^[1]



Choose 2 adaptation fixtures (1 for each device) + 1 set of cables

1 adaptation fixture for MasterPact MTZ2/3 fixed devices

LV847926SP

1 adaptation fixture for MasterPact MTZ2/3 drawout devices


LV847926SP

1 set of 2 cables

LV833209SP

[1] Can be used with any combination of MTZ1 or MTZ2/3, fixed or drawout devices.

Interlocking of 3 devices using cables

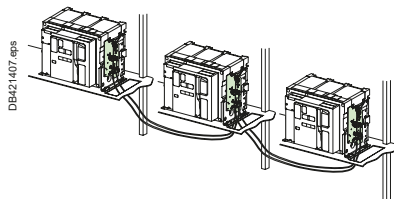

Choose 3 adaptation (including 3 adaptation fixtures + cables)

3 sources, only 1 device closed, fixed or drawout devices

LV848610SP


2 sources + 1 coupling, fixed or drawout devices

LV848609SP

2 normal + 1 replacement source, fixed or drawout devices

LV848608SP

Cable-type door interlock



1 complete assembly for MasterPact MTZ2/3 fixed or drawout device

LV848614SP


Note: the installation manual is enclosed.

MasterPact MTZ2/3

Indication contacts


Indication contacts

ON/OFF indication contacts (OF) / 12 parts



1 additional block of 4 contacts	LV864922SP
Wiring	For fixed circuit breaker
	For drawout circuit breaker (if necessary)
	LV847074SP x 4
	LV847849SP x 4

"Fault trip" indication contacts (SDE) / 1 part




Changeover contact (SDE)	6 A - 240 V	LV847915SP
	Low-level	LV847916SP
Wiring	For fixed circuit breaker	LV847074SP
	For drawout circuit breaker (if necessary)	LV847849SP

Remote reset after fault trip

Electrical reset RES	110/130 V AC	LV848202SP
	220/240 V AC	LV848203SP
Wiring	For fixed circuit breaker	LV847074SP
	For drawout circuit breaker (if necessary)	LV847849SP

"Ready to close" contact (1 max.) / 1 part



1 changeover contact (5 A - 240 V)	PF	LV847080SP
1 low-level changeover contact		LV847081SP
Wiring	For fixed circuit breaker	LV847074SP
	For drawout circuit breaker (if necessary)	LV847849SP

"Connected, disconnected, test position" indication contact (carriage switches) / 1 part



Changeover contacts	6 A - 240 V	LV833170SP
CE, CD, CT	Low-level	LV833171SP

Set of additional actuators for carriage switches / 1 set


1 set	LV848560SP
-------	------------

Note: The MasterPact MTZ2 and MTZ3 chassis is equipped in standard for receiving the following carriage switches combinations:

- chassis without EIFE: up to 3 CD + up to 3 CE + up to 3 CT
- chassis with EIFE: up to 3 CD + up to 3 CE.

Any other carriage switches possible combination different than the standard ones requires 1 set of additional actuators.

Combined closed / connected contacts for use with 1 auxiliary contact / 1 part




1 contact (5 A - 240 V)	LV848477SP
or 1 low-level contact	LV848478SP

Electrical closing pushbutton / 1 part



1 pushbutton	BPFE	LV848534SP
--------------	------	------------

Auxiliary terminals for chassis alone



3 wire terminal (1 part)	LV847849SP
6 wire terminal (1 part)	LV847850SP
Jumpers (10 parts)	LV847900SP

Auxiliary terminals for fixed circuit breaker







3 wire terminal block (1 part)	LV847074SP
6 wire terminal block (1 part)	LV847075SP


MasterPact MTZ2/3

Communication, monitoring and control


Communication option

	EIFE	Embedded Ethernet module full spare part kit for MTZ2/3-drawout	LV851200SP
		Embedded Ethernet spare part module MTZ1/2/3-drawout	LV851001SP
	IFM	Modbus interface	LV434000
	IFE	Ethernet interface LV breaker	LV434001
		Ethernet interface for LV breakers and gateway	LV434002
	Microswitches for MTZ2/3		LV847905SP
	EIFE Accessories spare part kit for MTZ2/3		LV851220SP
	I/O application module		LV434063

ULP port modules

	ULP port - for MasterPact MTZ2/3 - fixed	LV850061SP
	ULP port - for MasterPact MTZ2/3 - drawout	LV850062SP

Accessories for Diagnostics & Communicating Releases




	Isolation module - for MX1/XF communicating coils	LV850056SP
---	---	------------

Monitoring and control

Ethernet display module

	Switchboard front display module FDM128	LV434128
--	---	----------

ULP wiring accessories ^[1]

	Breaker ULP cord L = 0.35 m	LV434195
	Breaker ULP cord L = 1.3 m	LV434196
	Breaker ULP cord L = 3 m	LV434197
	Breaker ULP cord L = 5 m	LV434198
	Connector Modbus adaptor	LV434211
	10 Modbus line terminators	VW3A8306DRC ^[2]
	5 RJ45 connectors female/female	TRV00870
	10 ULP line terminators	TRV00880
	10 RJ45/RJ45 male cord L = 0.3 m	TRV00803
	10 RJ45/RJ45 male cord L = 0.6 m	TRV00806
	5 RJ45/RJ45 male cord L = 1 m	TRV00810
	5 RJ45/RJ45 male cord L = 2 m	TRV00820
	5 RJ45/RJ45 male cord L = 3 m	TRV00830
	1 RJ45/RJ45 male cord L = 5 m	TRV00850

^[1] For measurement display with MicroLogic X.

^[2] See www.schneider-electric.com.

Notes



Notes



Life Is On



Schneider Electric Industries SAS

35, rue Joseph Monier
CS 30323
92506 Rueil Malmaison Cedex
France

RCS Nanterre 954 503 439
Capital social 928 298 512 €
www.schneider-electric.com

01-2019

© 2019 - Schneider Electric. All Rights Reserved.
All trademarks are owned by Schneider Electric Industries SAS or its affiliated companies.
Document reference: COM-POWER-LVMKT215EN

This document has been
printed on recycled paper

