


A9C70342

Acti 9 - ARA autom. zakretna poluga pom. za iLD 2P - 1 prog.

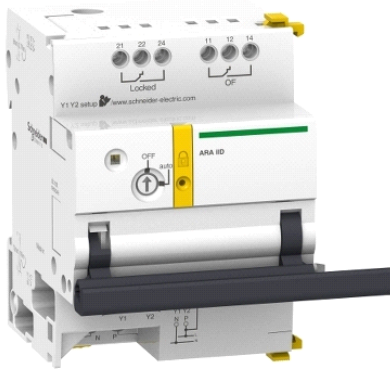

Glavno

Range	Acti 9
Product or component type	Automatic recloser auxiliary
Device short name	ARA iLD
Signal contacts composition	2 OF volt-free contacts
Signalling circuit voltage	24 V 10 mA AC/DC 230 V 1 A AC

Komplementarno

Control type	Inhibition of automatism maintained 230 V AC 50/60 Hz Ultimate reclosing impulse 230 V AC 50/60 Hz
Input current	5 mA
Impulse duration	>= 200 ms control circuit
Response time	< 500 ms
[Us] rated supply voltage	230 V AC 50/60 Hz
Power consumption in W	2 W
[Ui] rated insulation voltage	400 V
[Uimp] rated impulse withstand voltage	6 kV
Value of setting	Program 1 : 15 reclosing attempts, long fixed cycle
Local signalling	Flashing orange LED: not operational Flashing green LED: normal operation Flashing red LED: reclosing cycle in progress Fixed red LED: automatic recloser locked
Mounting mode	Clip-on
Mounting support	DIN rail
Comb busbar and distribution block compatibility	NO
9 mm pitches	7
Height	93 mm
Width	63 mm
Depth	75.5 mm
Product weight	440 g
Colour	White
Electrical durability	5000 cycles
Provision for padlocking	Padlockable
Wire stripping length	Power supply: 10 mm (bottom) Input: 10 mm (bottom) Output: 8 mm (top)
Tightening torque	Power supply: 1 N.m Input: 1 N.m Output: 0.7 N.m
Range compatibility	Acti 9: Acti 9 iLD residual current circuit breaker (RCCB)
Product compatibility	iLD 2P

Okolina

IP degree of protection	IP20 conforming to IEC 60529
-------------------------	------------------------------

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

	IP40 (in modular enclosure) conforming to IEC 60529
pollution degree	3 conforming to IEC 60947
overvoltage category	II
tropicalisation	2
relative humidity	93 % at 40 °C
ambient air temperature for storage	-40...70 °C
ambient air temperature for operation	-25...60 °C

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 1312 - Schneider Electric declaration of conformity	Compliant - since 1312 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Available	Available