


BMXNOE0100H

Ethernet TCP/IP mrežni modul M340 – „transparent ready” server razred B30



Glavno

Range of product	Modicon M340 automation platform
Product or component type	Ethernet TCP/IP network module
Product specific application	For severe environments
Concept	Transparent Ready
Integrated connection type	Ethernet TCP/IP RJ45 10/100 Mbit/s 1 twisted pair transparent ready class B30
Protective treatment	Conformal coating Humiseal 1A33 TC
Environmental characteristic	3C3 conforming to EN/IEC 60721-3-3 3C4 conforming to EN/IEC 60721-3-3

Komplementarno

Communication service	Bandwidth management FDR server Global Data I/O scanning Modbus TCP messaging SNMP network administrator Data Editor (via PC terminal) Rack Viewer Web server configurable
Port Ethernet	10BASE-T/100BASE-TX
Memory description	Supplied Flash memory card (BMXRWSC016M)
Memory usage	Application saving Activating the standard web server
Supply	Internal power supply via rack
Local signalling	1 LED green activity on Ethernet network (ETH ACT) 1 LED green processor running (RUN) 1 LED green status of Ethernet network (ETH STS) 1 LED red data rate (ETH 100) 1 LED red memory card fault (CARD ERR) 1 LED red processor or system fault (ERR)
Control type	RESET push-button cold restart
Current consumption	90 mA at 24 V DC
Module format	Standard
Product weight	0.2 kg

Okolina

ambient air temperature for operation	-25...70 °C
relative humidity	10...95 % without condensation
IP degree of protection	IP20
marking	CE
directives	2012/19/EU - WEEE directive 2014/30/EU - electromagnetic compatibility 2014/35/EU - low voltage directive
product certifications	UL 508
standards	EN 61000-6-2 EN 61000-6-4 EN 61131-2 EN 61010-2-201

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Offer Sustainability


Green Premium product	Green Premium product
Compliant - since 0911 - Schneider Electric declaration of conformity	Compliant - since 0911 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Available	Available

Contractual warranty

Warranty period	18 months
-----------------	-----------

Modules Mounted on Racks

Dimensions

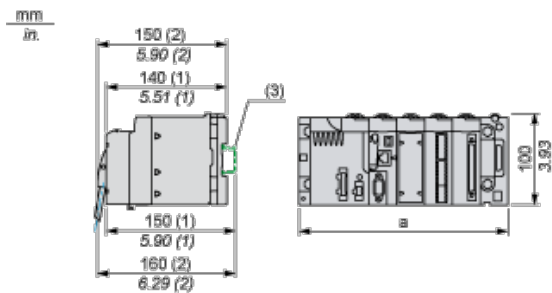

- (1) With removable terminal block (cage, screw or spring).
- (2) With FCN connector.
- (3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81