

## GV2G05

TeSys GV2, TeSys D i TeSys U – priključni blok – 3P  
– za GV1L3



### Glavno

Range	Linery
Product name	FT
Device short name	GV2G
Product or component type	Terminal block
Accessory / separate part category	Connection accessory
Poles description	3P
Range compatibility	TeSys - GV2 TeSys - U TeSys - D TeSys - K

### Komplementarno

[Ie] rated operational current	63 A
Mounting location	Top
IP degree of protection	IP20 according to IEC 60529
[Ui] rated insulation voltage	690 V according to IEC 60947-1
Connections - terminals	Screw clamp terminals 1 flexible AWG 4 Screw clamp terminals 1 solid AWG 4 Screw clamp terminals 1 cable(s) 1.5...25 mm <sup>2</sup> solid Screw clamp terminals 2 cable(s) 1.5...6 mm <sup>2</sup> solid Screw clamp terminals 1 cable(s) 1.5...10 mm <sup>2</sup> flexible with cable end Screw clamp terminals 1 cable(s) 1.5...16 mm <sup>2</sup> flexible without cable end Screw clamp terminals 2 cable(s) 1.5...2 mm <sup>2</sup> flexible with cable end Screw clamp terminals 2 cable(s) 2.5...4 mm <sup>2</sup> flexible without cable end
Tightening torque	1.7 N.m - on screw clamp terminals 2.2 N.m - on connector
Product weight	0.115 kg

### Okolina

#### Offer Sustainability


Green Premium product	Green Premium product
Compliant - since 0640 - Schneider Electric declaration of conformity	Compliant - since 0640 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations

#### Contractual warranty

Warranty period	18 months
-----------------	-----------

### Sets of Busbars GV2G445, GV2G454, GV2G472, with Terminal Block GV2G05

Informacije dane u ovoj dokumentaciji sadrže opće i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

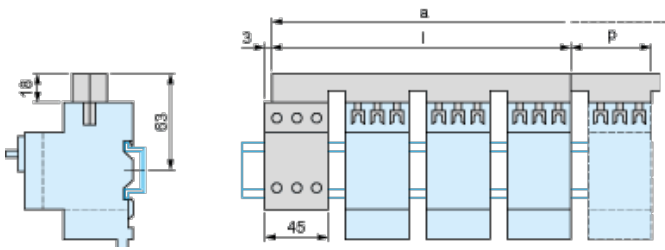

	l	p
GV2G445 (4 x 45 mm)	179	45
GV2G454 (4 x 54 mm)	206	54
GV2G472 (4 x 72 mm)	260	72

Number of tap-offs	a			
	5	6	7	8
GV2G445	224	269	314	359
GV2G454	260	314	368	422
GV2G472	332	404	476	548