


## LX4FK125

TeSys F – zavojnica sklopnika – LX4FK – 125 V DC

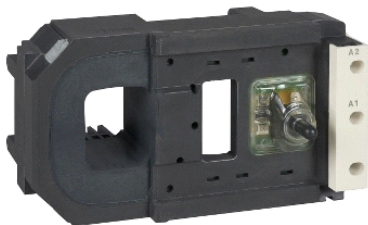

### Glavno

Range	TeSys
Product or component type	Contacteur coil
Device short name	LX4FK
Range compatibility	TeSys F LC1F contactor
Product compatibility	LC1F500
Control circuit type	DC low consumption
[Uc] control circuit voltage	125 V DC
Average resistance	15 Ohm inrush at 20 °C 2930 Ohm holding at 20 °C
Inductance of closed circuit	400 H
Operating time	45...60 ms opening 50...60 ms closing
Mechanical durability	10 Mcycles
Operating rate	<= 2400 cyc/h at <= 55 °C

### Komplementarno

Coil technology	Without built-in suppressor module
Control circuit voltage limits	0.85...1.1 Uc at 55 °C operational 0.2...0.35 Uc at 55 °C drop-out
Inrush power in W	1100 W at 20 °C
Hold-in power consumption in W	6 W at 20 °C

### Okolina

ambient air temperature for operation	> -5...55 °C
product weight	1.08 kg

### Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0830 - Schneider Electric declaration of conformity	Compliant - since 0830 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Available	Available

### Contractual warranty

Warranty period	18 months
-----------------	-----------

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i poplunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.