


METSECT5DA060

strujni transf. u tropskoj izvedbi 600 5 dvostruki izlaz
za sabirnice 32x65

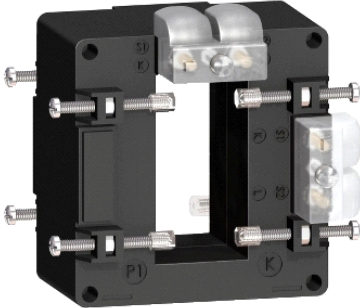

Glavno

Range	PowerLogic
Product name	CT
Product or component type	Current transformer
Secondary current	5 A
Accuracy class	Class 0.5 maximum power: 8 VA Class 1 maximum power: 12 VA
[In] rated current	600 A

Komplementarno

Current transformer type	Tropicalised for busbar
Current transformer ratio	600/5
[Ith] conventional free air thermal current	36 kA
Dynamic withstand current	2.5 Ith
Safety factor	
[Ue] rated operational voltage	< 720 V AC at 50/60 Hz
[Ui] rated insulation voltage	3 kV
Mounting mode	Insulated locking screw
Mounting support	Busbar
Width	90 mm outside 65 mm inner
Height	94 mm outside 32 mm inner
Depth	40 mm outside
Product weight	0.541 kg
[Uimp] rated impulse withstand voltage	3 kV
Electrical insulation class	Class B
Opening of bars	65 x 32
Sealing	With

Okolina

standards	VDE 0414 IEC 61869-2
product certifications	CE EAC
IP degree of protection	IP20
relative humidity	0...95 %
ambient air temperature for operation	-25...60 °C

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 1427 - Schneider Electric declaration of conformity	Compliant - since 1427 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available

