


## NSYSF22860P

Kućište Spacial SF s montažnom pločom –  
sastavljeno – 2200 x 800 x 600 mm

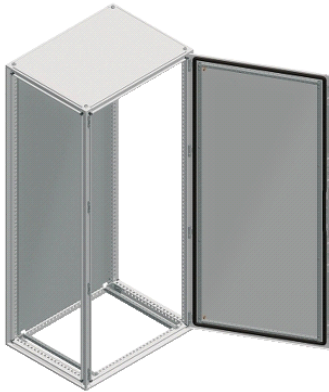

### Glavno

|                           |                                                                                                                                                             |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range                     | Spacial                                                                                                                                                     |
| Product name              | Spacial SF                                                                                                                                                  |
| Device application        | Multi-purpose                                                                                                                                               |
| Product or component type | Suitable enclosure                                                                                                                                          |
| Enclosure nominal height  | 2200 mm                                                                                                                                                     |
| Enclosure nominal width   | 800 mm                                                                                                                                                      |
| Enclosure nominal depth   | 600 mm                                                                                                                                                      |
| Enclosure mounting        | Floor-standing                                                                                                                                              |
| Device composition        | 1 door<br>1 mounting plate<br>1 rear panel<br>1 roof<br>1 structure<br>1 locking system with handle for door<br>2 sliding rails<br>4 mounting plate bracket |

### Komplementarno

|                             |                                                                                                                                                                                                                             |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Structure type              | Formed from a single section<br>Vertical uprights joined with top and bottom frames<br>Panels and doors built into the structure<br>Perforated structure with a pitch of 25 mm                                              |
| Door type                   | Plain on front                                                                                                                                                                                                              |
| Number of doors             | 1 on front                                                                                                                                                                                                                  |
| Door opening side           | Reversible 120 °                                                                                                                                                                                                            |
| Lock type                   | 4 points lock, handle with 5 mm double bar insert on front door                                                                                                                                                             |
| Mounting plate description  | Plain                                                                                                                                                                                                                       |
| Type of gland plate         | Without gland plate                                                                                                                                                                                                         |
| Accessibility for operation | Front<br>Rear<br>Sides of enclosure                                                                                                                                                                                         |
| Removable parts             | Rear panel fixed by screws<br>Roof fixed by screws<br>Door fixed by screws for hinge<br>Mounting plate bracket fixed by screws<br>Sliding rail fixed by screws<br>Mounting plate fixed by screws for mounting plate bracket |
| Material                    | Galvanised steel for frame<br>Galvanised steel for uprights<br>Polyamide 6 with 30 % fibre glass for handle<br>Sheet steel for door<br>Sheet steel for panels<br>Zamak for hinge                                            |
| Surface finish              | Epoxy-polyester powder                                                                                                                                                                                                      |
| Colour                      | Enclosure: grey RAL 7035<br>Handle: black RAL 9005                                                                                                                                                                          |

### Okolina

|                         |                              |
|-------------------------|------------------------------|
| standards               | IEC 62208                    |
| IP degree of protection | IP55 conforming to IEC 60529 |
| IK degree of protection | IK10 conforming to IEC 62262 |

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.  
Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.  
Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i popunivu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.  
Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

## Offer Sustainability

|                                                                       |                                                                       |
|-----------------------------------------------------------------------|-----------------------------------------------------------------------|
| Green Premium product                                                 | Green Premium product                                                 |
| Compliant - since 0940 - Schneider Electric declaration of conformity | Compliant - since 0940 - Schneider Electric declaration of conformity |
| Reference not containing SVHC above the threshold                     | Reference not containing SVHC above the threshold                     |
| Available                                                             | Available                                                             |
| Need no specific recycling operations                                 | Need no specific recycling operations                                 |

## Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|