


NSYTBS1176

Kutija ABS IP66 IK07 RAL7035 Unut.V105 Š65 D55
Vanj.V116 Š74 D62,neproz.pok.H10

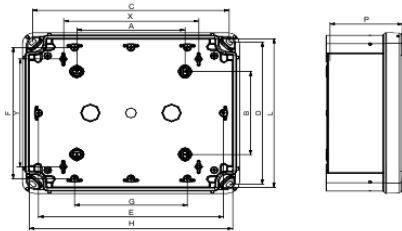

Glavno

Range	Thalassa
Product name	Thalassa TBS
Device application	Multi-purpose
Product or component type	Industrial box
Height	116 mm
Width	74 mm
Depth	62 mm
Internal height	105 mm
Internal width	65 mm
Internal depth	55 mm
Enclosure mounting	Wall mounted
Device composition	1 x body 1 x cover 4 x cover screw
Quantity per set	Set of 5
Body type	One piece moulded
Type of front cover	Low plain cover
Cover fixing	Metal screws
Lock type	Outside sealed area: flat screwdriver captive screw
Removable parts	Cover, by captive screws

Komplementarno

Material	ABS (acrylonitrile butadiene-styrene)
Colour	Grey (RAL 7035)
Standards	IEC 62208
Product certifications	DEMKO SEMKO TÜV
Electrical insulation class	Class II
IP degree of protection	IP66 conforming to NEMA 4.4X
IK degree of protection	IK07 conforming to IEC 62262
Fire resistance	650 °C conforming to IEC 60695-2-11
Ambient air temperature for storage	-15...40 °C
Ambient air temperature for operation	-25...60 °C
Product weight	0.108 kg

Okolina

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0940 - Schneider Electric declaration of conformity	Compliant - since 0940 - Schneider Electric declaration of conformity
Reference contains SVHC above the threshold - go to CaP for more details	Reference contains SVHC above the threshold
Available	Available

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Need no specific recycling operations

Need no specific recycling operations

Contractual warranty

Warranty period

18 months
