

## XB2SL32009

prazna kontrolna stanica – XB2-S – slitina aluminija –  
6 otvora u 3 stupca



### Glavno

Range of product	Harmony XAP
Product or component type	Empty control station
Device short name	XB2SL
Product destination	For Ø 22 mm control and signalling units
Product front plate size	150 x 150 mm
Usable depth	78 mm
Number of cut-out	6 cut-outs
Colour of base of enclosure	Blue
Colour of cover	Blue
Material	Aluminium alloy
Cable entry	2 holes with blanking plug for cable gland with ≤ 12 mm
Product mounting	Flush mounting
IP degree of protection	IP547 conforming to NF C 20-010 IP54 conforming to IEC 60529

### Komplementarno

Number of vertical rows	3
Product weight	0.97 kg


### Okolina

protective treatment	TC
ambient air temperature for storage	-40...70 °C
ambient air temperature for operation	-25...70 °C
electrical shock protection class	Class I conforming to IEC 60536 Class I conforming to NF C 20-030

### Contractual warranty

Warranty period	18 months
-----------------	-----------

### Dimensions and Fixing

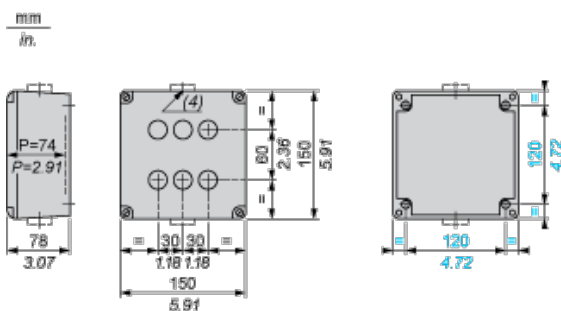

- (4) 2 holes, with blanking plug (protrusion 7.5 mm/0.29 in.), for cable glands with 12 mm/0.47 in. maximum clamping capacity.  
P Usable depth

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.  
 Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.  
 Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.  
 Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu sadržanih informacija.