


XKMA991

kontaktni blok – pregorijevanje standg kontakta –
kompatibilno s XKM

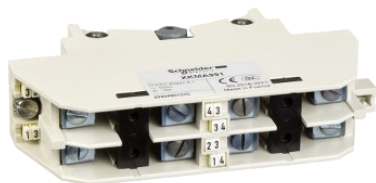

Glavno

Product or component type	Controllers separate parts
Accessory / separate part category	Control accessory
Product specific application	Heavy hoisting applications
Product compatibility	XKM
Accessory / separate part type	Contact block
Number of contacts	4
Contact blow-out type	Standard

Komplementarno

Electrical connection	Screw clamp terminal, connection capacity: 1 x 1.5...2 x 2.5 mm ²
Contact operation	Double-break Slow-break
[I _{th}] conventional free air thermal current	20 A conforming to IEC 337-1 20 A conforming to NF C 63-140 20 A conforming to VDE 0660
[U _i] rated insulation voltage	500 V AC/DC conforming to IEC 158-1 500 V AC/DC conforming to NF C 20-040 500 V AC/DC conforming to VDE 0110 600 V conforming to CSA C22.2 No 14
Positive opening	With
Resistance across terminals	<= 25 MOhm at 1 A conforming to NF C 93-050
Short-circuit protection	20 A cartridge fuse type gG conforming to IEC 337-1B 20 A cartridge fuse type gG conforming to VDE 0660 part 2
Electrical durability	3000000 cycles DC inductive load at 120 V, power broken = 75 conforming to IEC 337-1 DC-11, operating rate = 60 cyc/mn 0.5 3000000 cycles DC inductive load at 24 V, power broken = 70 conforming to IEC 337-1 DC-11, operating rate = 60 cyc/mn 0.5 3000000 cycles DC inductive load at 48 V, power broken = 75 conforming to IEC 337-1 DC-11, operating rate = 60 cyc/mn 0.5
Product weight	0.31 kg

Okolina

standards	CENELEC EN 50013
-----------	------------------

Contractual warranty

Warranty period	18 months
-----------------	-----------

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.
 Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.
 Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.
 Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.