

RSZE1S48M

utičnica RSZ – odvojeni kontakt – < 250 V AC –
vijčani konektor



Glavno

Range of product	Zelio Relay
Product or component type	Socket
Contact terminal arrangement	Separate
Product compatibility	Plug-in relay RSB (1 C/O) Plug-in relay RSB (2 C/O)
Shape of pin	Flat
Device short name	RSZ
Sale per indivisible quantity	10

Komplementarno

[Ith] conventional free air thermal current	10 A
[Ue] rated operational voltage	< 250 V AC
Tightening torque	< 0.8 N.m (M3 screw(s))
Fixing mode	By screw mounting on panel Clip-on mounting on 35 mm symmetrical DIN rail
Marking	CE
Width	15.5 mm
Product weight	0.05 kg

Okolina


connections - terminals	Screw connectors, flexible cable with cable end 1 x 0.25...1 x 2.5 mm ² / AWG 22...AWG 14 Screw connectors, flexible cable with cable end 2 x 0.25...2 x 1 mm ² / AWG 22...AWG 17 Screw connectors, solid cable without cable end 1 x 0.5...1 x 2.5 mm ² / AWG 20...AWG 14 Screw connectors, solid cable without cable end 2 x 0.5...2 x 1.5 mm ² / AWG 20...AWG 16
standards	IEC 61984
product certifications	CSA UL
ambient air temperature for storage	-40...85 °C
ambient air temperature for operation	-25...85 °C
IP degree of protection	IP20 conforming to EN/IEC 60529
dielectric strength	2500 V

Contractual warranty

Warranty period	18 months
-----------------	-----------


Dimensions

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih podružnica ili područja neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

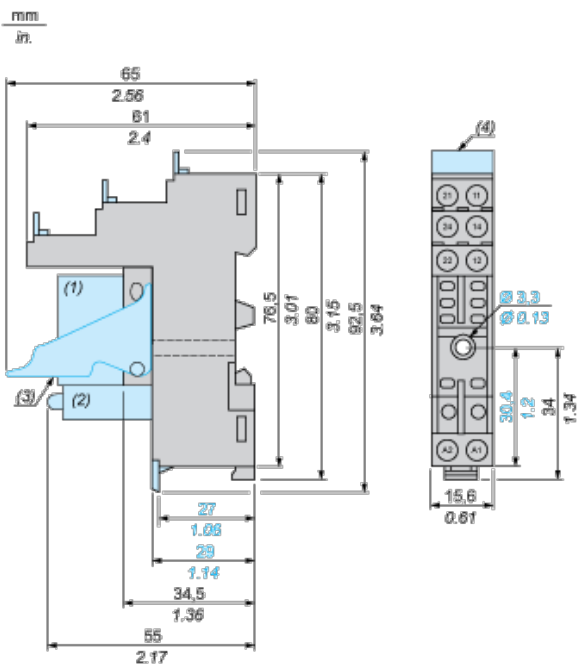

- (1) Relays
- (2) Protection module
- (3) Maintaining clamp
- (4) Legend

Wiring Diagram

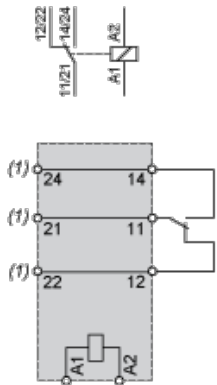

- (1) Before wiring please refer to the Instruction sheet