


## XB2BN4161

tipkalo 600 V AC 10 A 22 mm XB2 + opcije

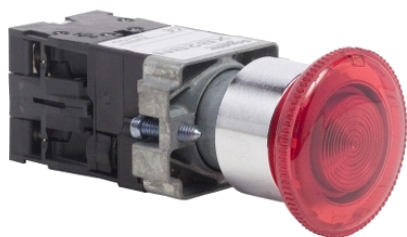

### Glavno

|                               |                       |
|-------------------------------|-----------------------|
| Range of product              | Harmony XB2           |
| Product or component type     | Push-button           |
| Device presentation           | Complete mechanism    |
| Device short name             | XB2B                  |
| Bezel material                | Chromium plated metal |
| Mounting diameter             | 22 mm                 |
| Sale per indivisible quantity | 1                     |

### Komplementarno

|   |  |
|---|--|
| Specificity of operator                     | Mushroom button head   |
| Control type                                | Illuminated push-button  |
| Terminals description ISO n°1               | (13-14)NO<br>(21-22)NC   |
| Shape of signaling unit head                | Round  |
| Type of operator                            | Maintained   |
| Operator profile                            | Mushroom Ø 40 mm, cap/operator or lens colour:red (unmarked marking) |
| Contacts type and composition               | 1 NO + 1 NC  |
| [Ith] conventional free air thermal current | 10 A conforming to EN/IEC 60947-5-1                                  |
| [Ui] rated insulation voltage               | 600 V 3 conforming to EN/IEC 60947-1                                 |

### Okolina

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.