


LV432454

zemljospojni modul Compact Vigi MB –
300..30000 mA – 440..550 V – 4 pola

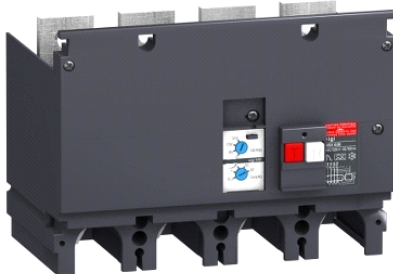

Glavno

Range of product	NSX400...630
Range	Compact
Product or component type	Vigi add-on
Device application	Wiring
Range compatibility	Compact - Compact NSX circuit breaker
Poles description	4P
[In] rated current	400 A 630 A
Earth-leakage add-on module name	MB
Earth-leakage protection class	Class A
Residual earth-leakage sensitivity adjustment type	Adjustable 5 settings
[IΔn] residual earth-leakage sensitive adjustment	0.3...30 A
Residual earth-leakage time delay adjustment type	Adjustable 4 settings
[Δt] residual earth-leakage time delay adjustment	0 ms 150 ms 310 ms 60 ms

Komplementarno

Network type	AC
Network frequency	50/60 Hz
[Ue] rated operational voltage	440...550 V AC 50/60 Hz conforming to IEC 60947-2
Earth-leakage protection	With
Maximum breaking time	< 800 ms
Overvoltage category	Class II

Okolina

electrical shock protection class	Class II
standards	IEC 60947-2

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0818 - Schneider Electric declaration of conformity	Compliant - since 0818 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available

Contractual warranty

Warranty period	18 months
-----------------	-----------

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.