


NSYSF2212602DP

Kućište Spacial SF s montažnom pločom –
sastavljeno – 2200 x 1200 x 600 mm

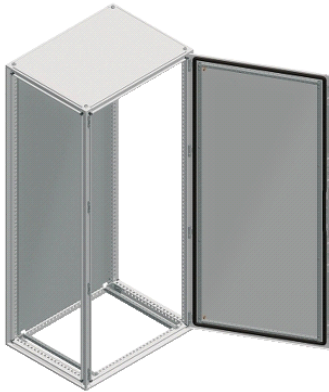

Glavno

Range	Spacial
Product name	Spacial SF
Device application	Multi-purpose
Product or component type	Suitable enclosure
Enclosure nominal height	2200 mm
Enclosure nominal width	1200 mm
Enclosure nominal depth	600 mm
Enclosure mounting	Floor-standing
Device composition	1 blocking system for left door 1 mounting plate 1 rear panel 1 roof 1 structure 2 sliding rails 4 mounting plate bracket 2 door 1 locking system with handle

Komplementarno

Structure type	Formed from a single section Vertical uprights joined with top and bottom frames Panels and doors built into the structure Perforated structure with a pitch of 25 mm
Door type	Plain on front
Number of doors	2 on front face
Door opening side	Left 120 ° Right 120 °
Lock type	4 points lock, handle with 5 mm double bar insert on front right door
Mounting plate description	Plain
Type of gland plate	Without gland plate
Accessibility for operation	Front Rear Sides of enclosure
Removable parts	Rear panel fixed by screws Roof fixed by screws Door fixed by screws for hinge Mounting plate bracket fixed by screws Sliding rail fixed by screws Mounting plate fixed by screws for mounting plate bracket
Material	Galvanised steel for frame Galvanised steel for uprights Polyamide 6 with 30 % fibre glass for handle Sheet steel for door Sheet steel for panels Zamak for hinge
Surface finish	Epoxy-polyester powder
Colour	Enclosure: grey RAL 7035 Handle: black RAL 9005

Okolina

standards	IEC 62208
IP degree of protection	IP55 conforming to IEC 60529

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

IK degree of protection	IK10 conforming to IEC 62262
-------------------------	------------------------------

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0940 - Schneider Electric declaration of conformity	Compliant - since 0940 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------
